


SHINDENGEN

Darlington Transistor

2SD1791
(TP7L10)

7A NPN

OUTLINE DIMENSIONS

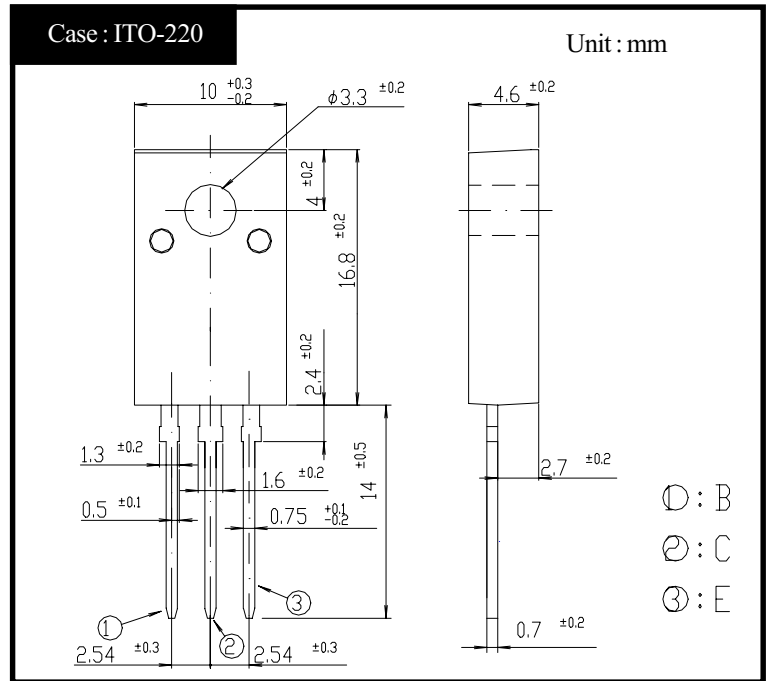

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55~+150	°C
Junction Temperature	T_j		+150	°C
Collector to Base Voltage	V_{CBO}		100	V
Collector to Emitter Voltage	V_{CEO}		100	V
Emitter to Base Voltage	V_{EBO}		7	V
Collector Current DC	I_C		7	A
Collector Current Peak	I_{CP}		10	A
Base Current DC	I_B		0.5	A
Base Current Peak	I_{BP}		1.0	A
Total Transistor Dissipation	P_T	$T_C = 25^\circ\text{C}$	30	W
Dielectric Strength	V_{dis}	Terminals to case AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

● Electrical Characteristics ($T_C=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 100\text{V}$	Max 0.1	mA
	I_{CEO}	$V_{CE} = 100\text{V}$	Max 0.1	
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 7\text{V}$	Max 5	mA
DC Current Gain	h_{FE}	$V_{CE} = 3\text{V}, I_C = 3\text{A}$	Min 1,500	
			Max 30,000	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3\text{A}$	Max 1.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_B = 5\text{mA}$	Max 2.0	V
Thermal Resistance	θ_{jc}	Junction to case	Max 4.17	°C/W
Transition Frequency	f_T	$V_{CE} = 10\text{V}, I_C = 0.7\text{A}$	TYP 20	MHz
Turn on Time	t_{on}		Max 2	μs
Storage Time	t_s	$I_C = 3\text{A}$	Max 12	
		$I_{B1} = I_{B2} = 5\text{mA}$		
Fall Time	t_f	$R_L = 10\Omega$ $V_{BB2} = 4\text{V}$	Max 5	

2SD1791

$h_{FE} - I_C$

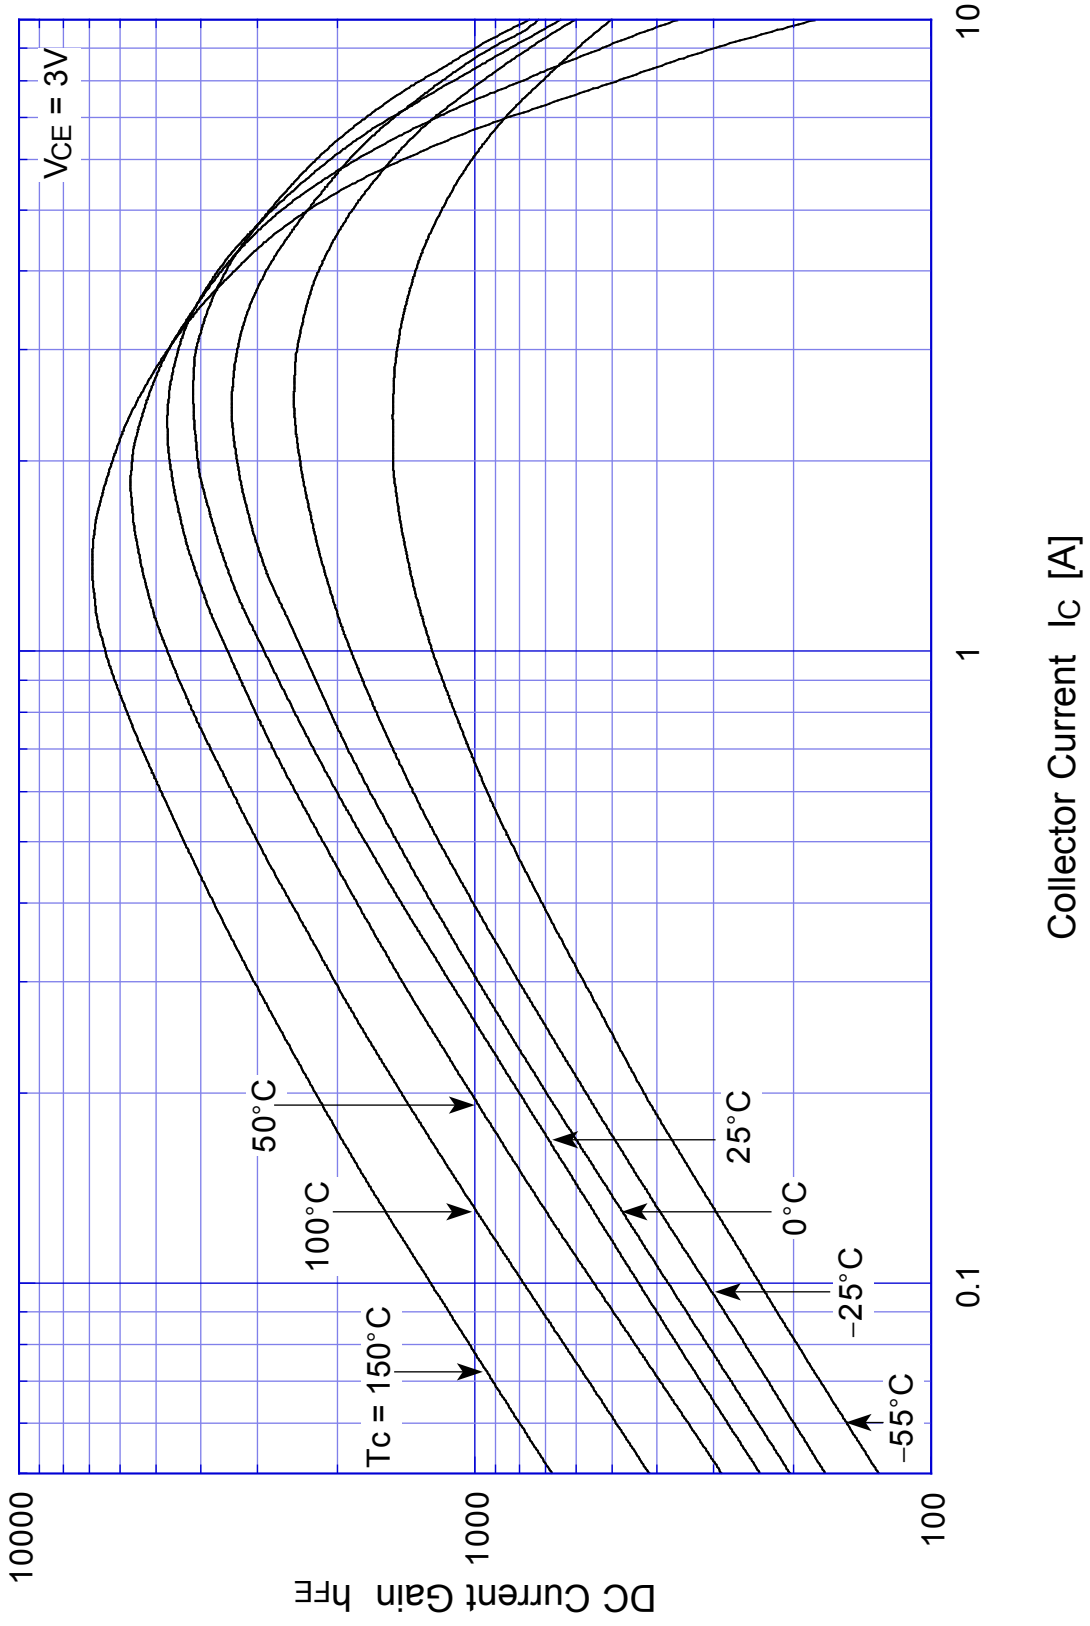


2SD1791 Saturation Voltage

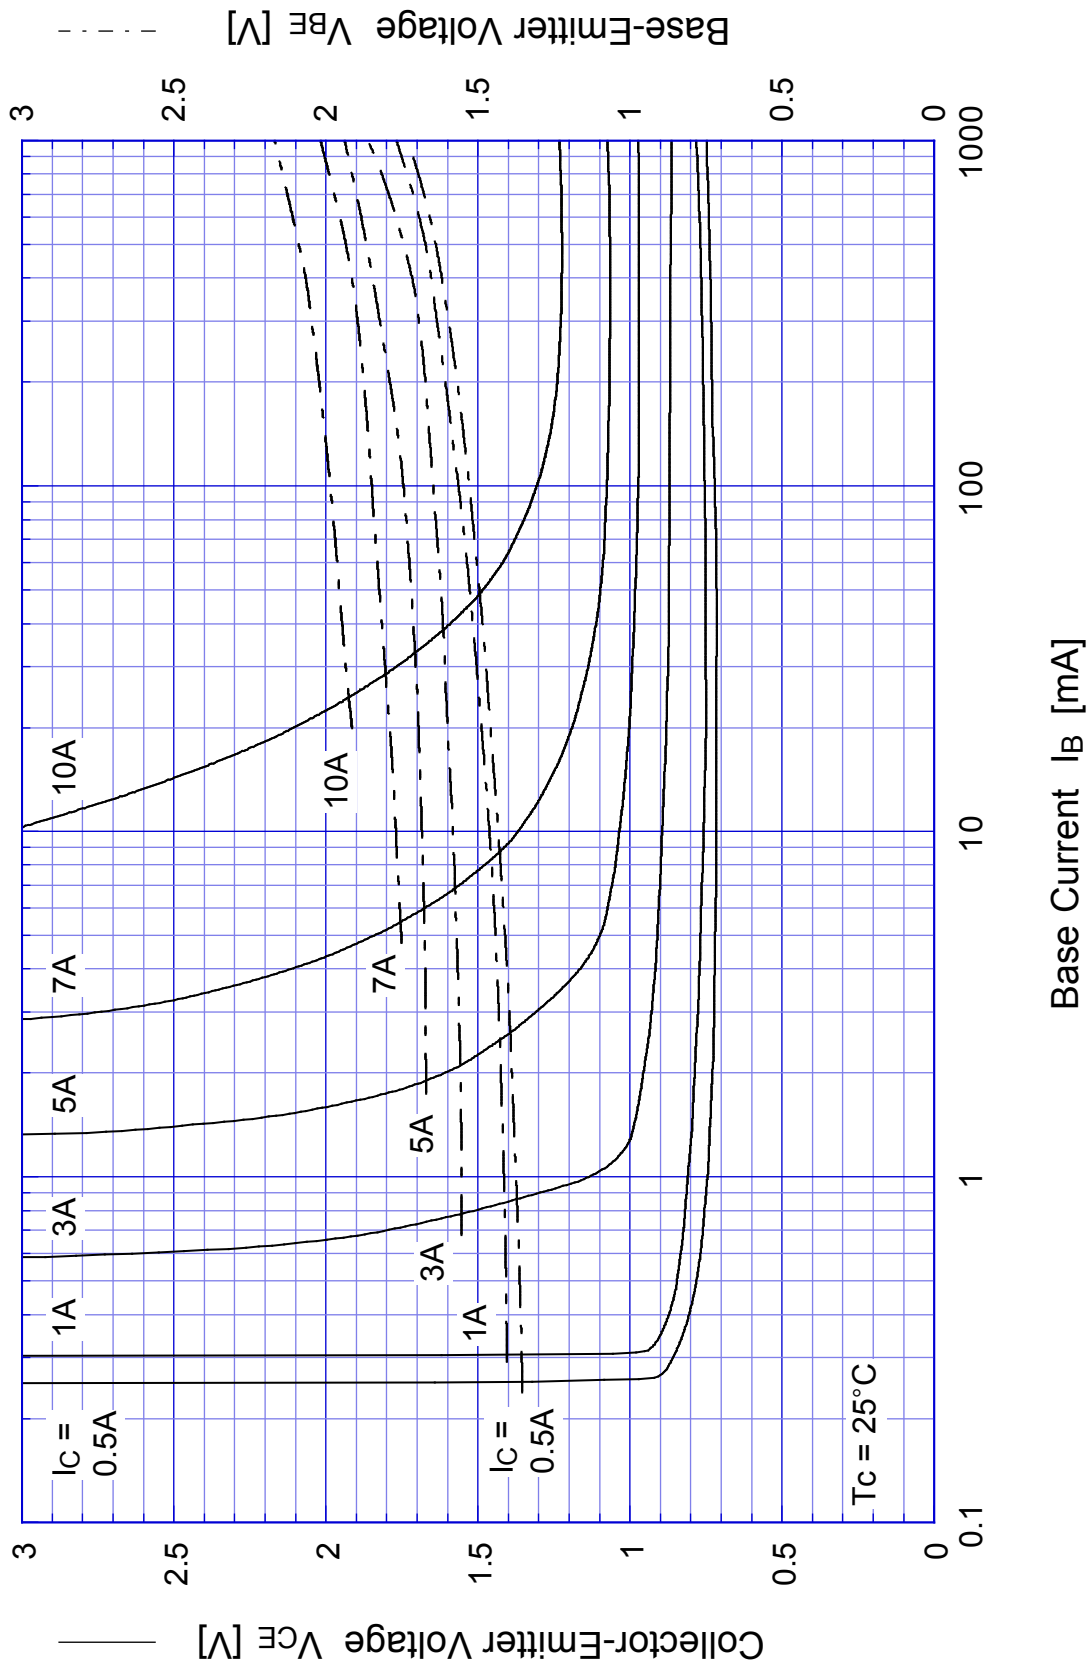


2SD1791

Switching Time - I_C

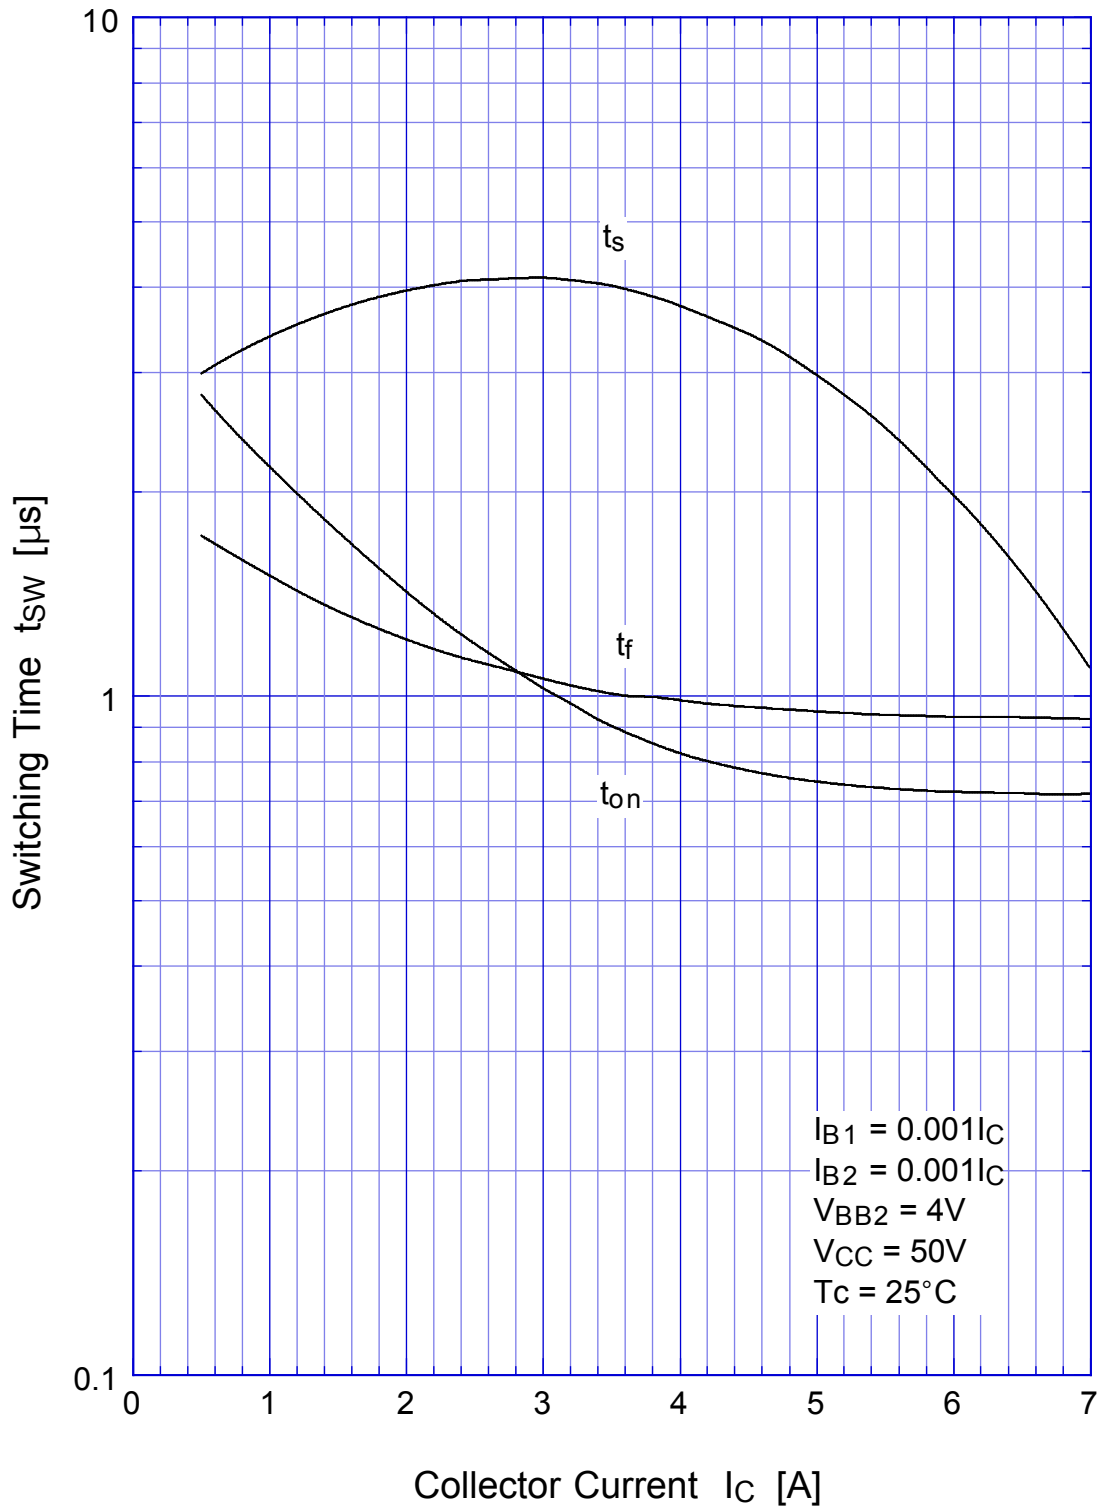


2SD1791

Switching Time - Tc

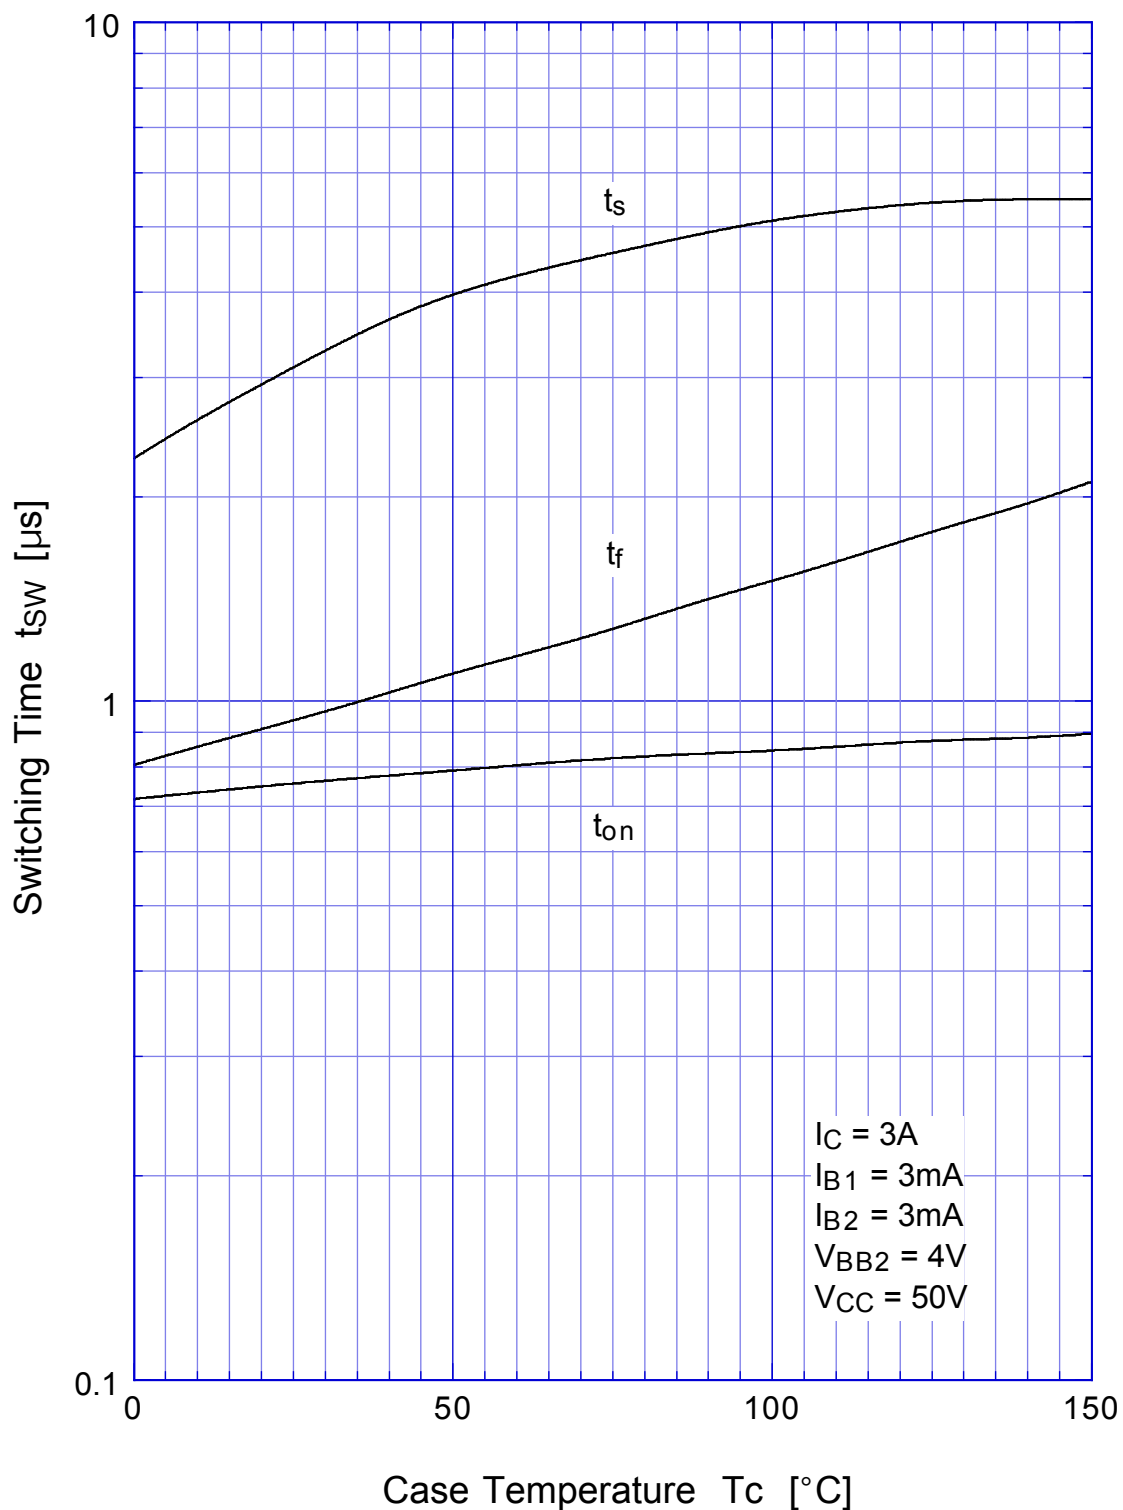


2SD1791 Transient Thermal Impedance

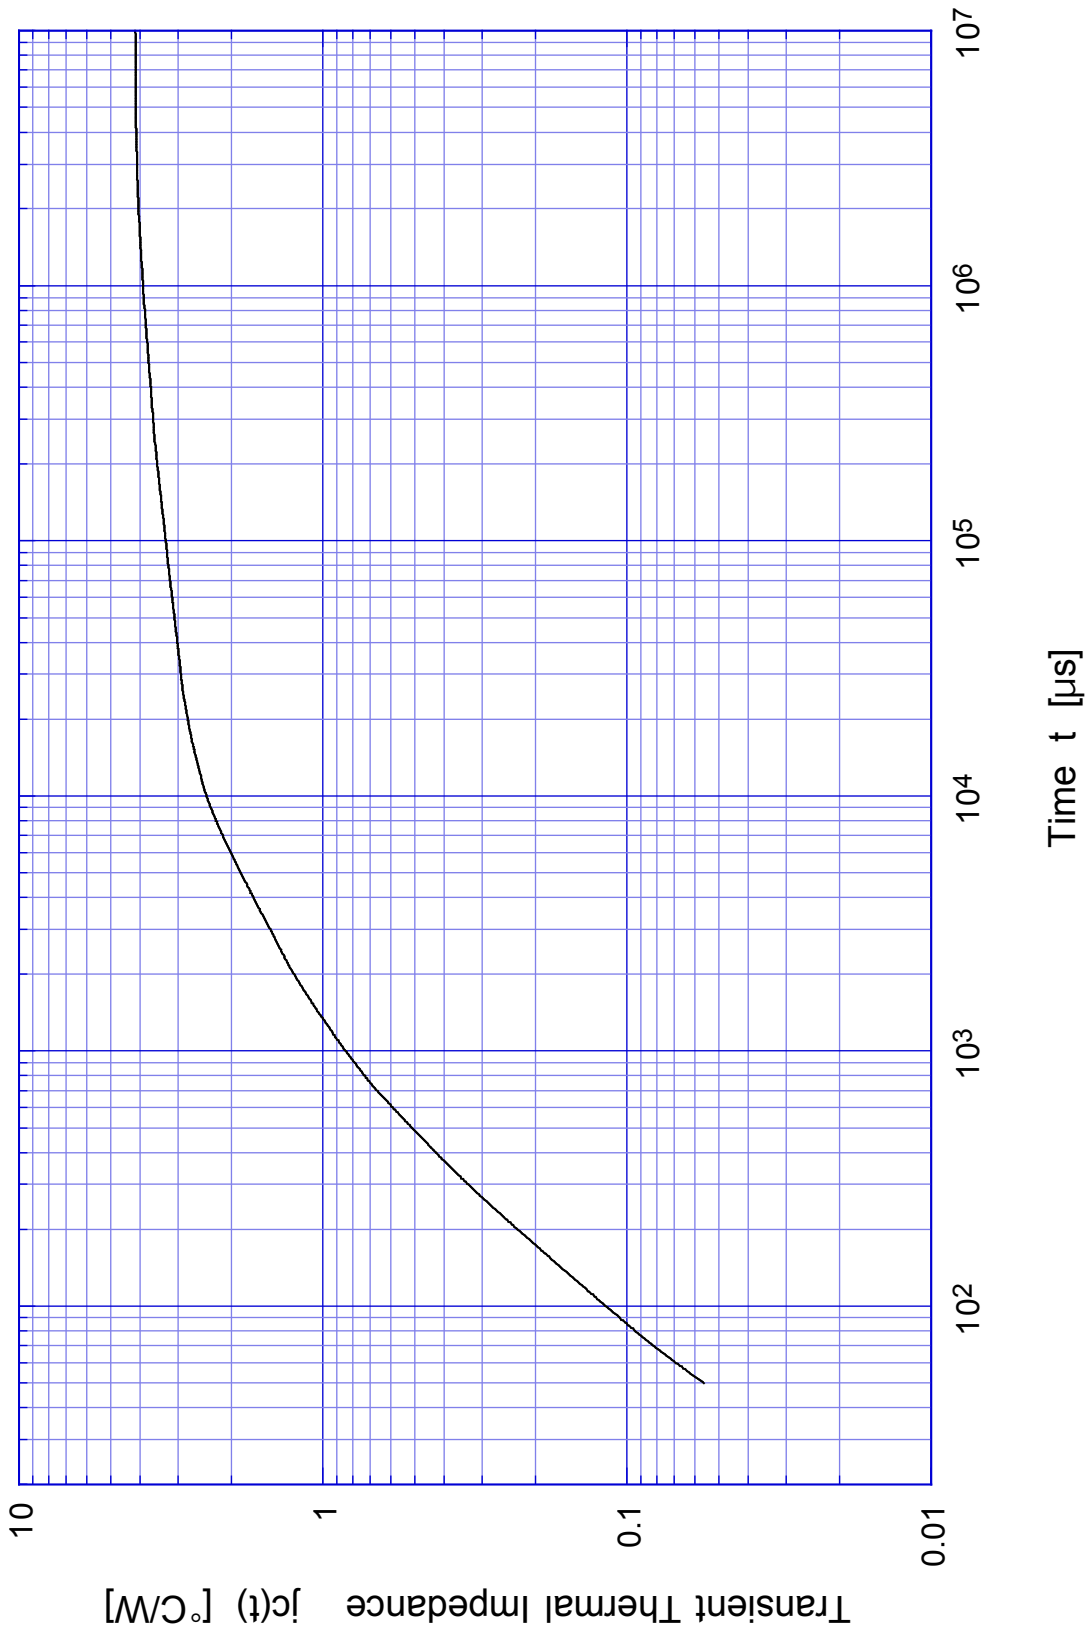

2SD1791

Forward Bias SOA

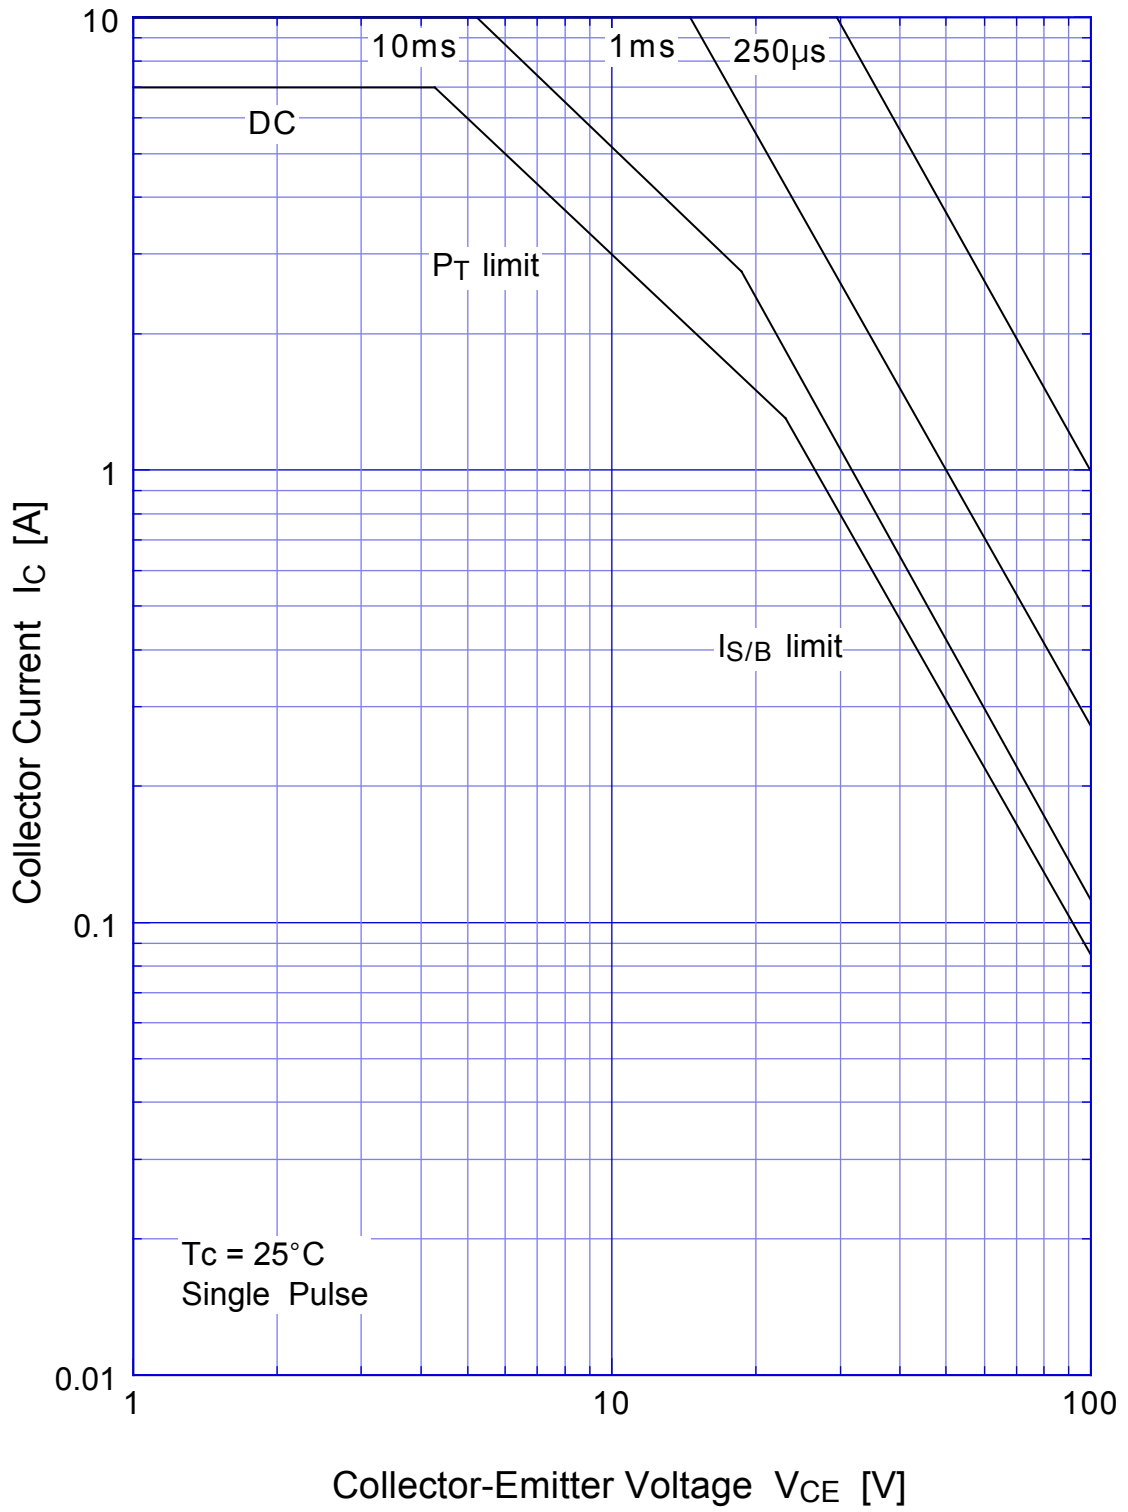


2SD1791 Collector Current Derating



2SD1791

Reverse Bias SOA

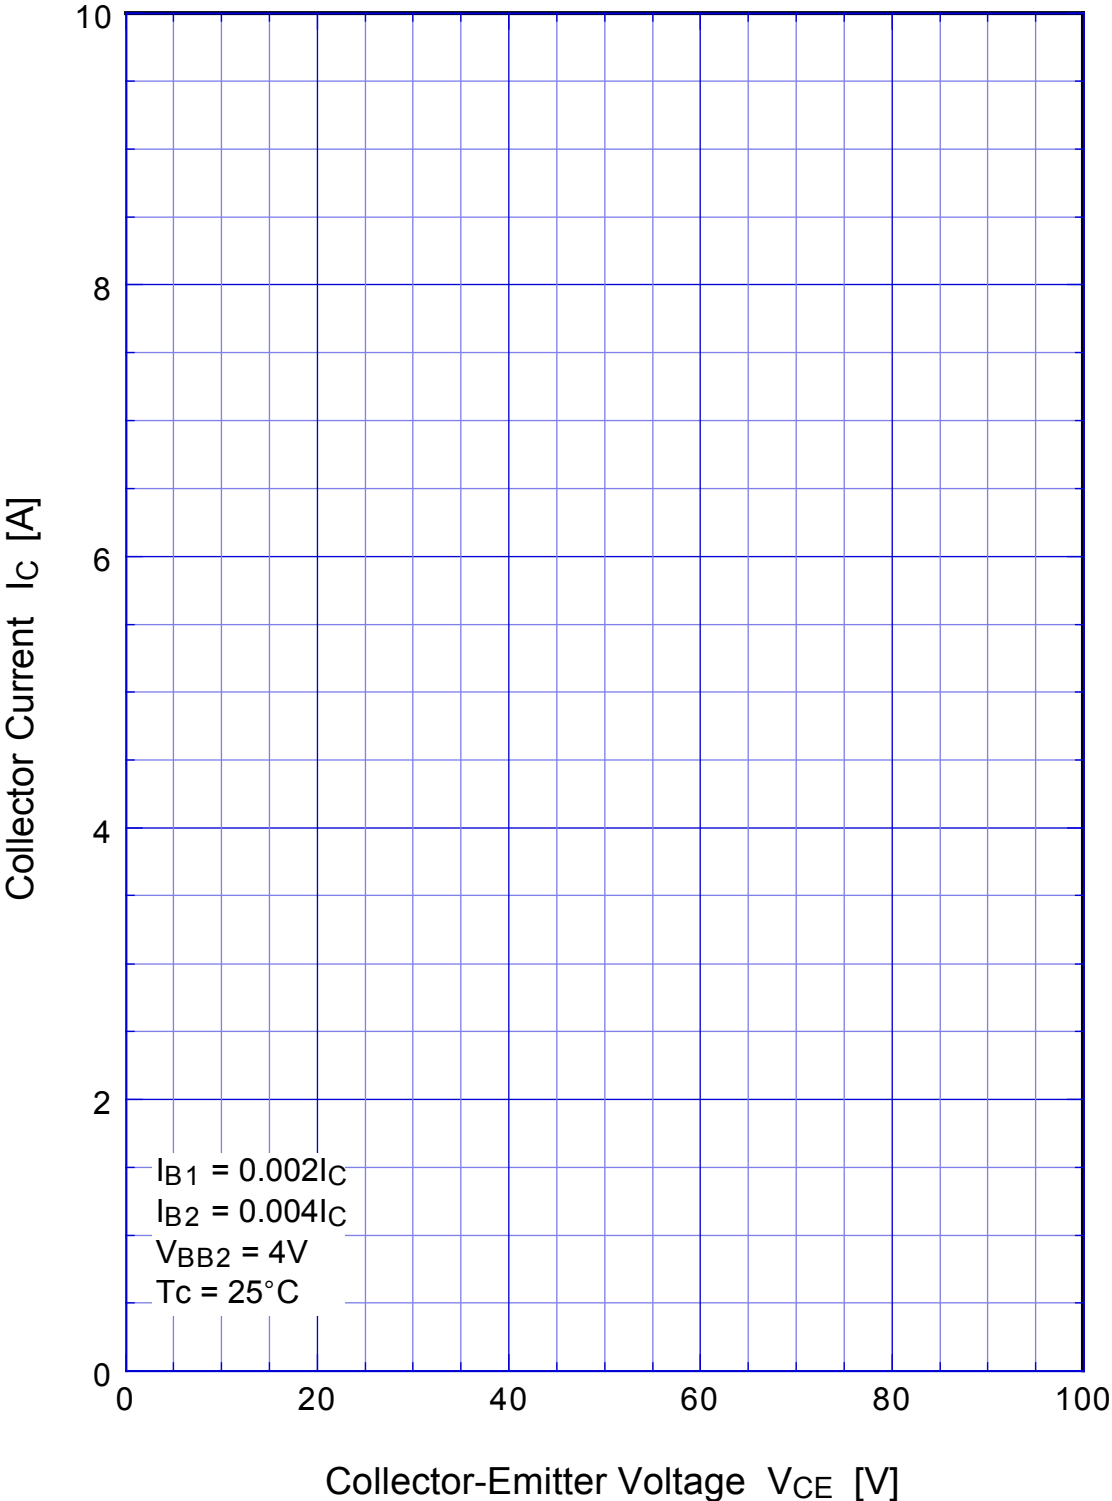

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.