
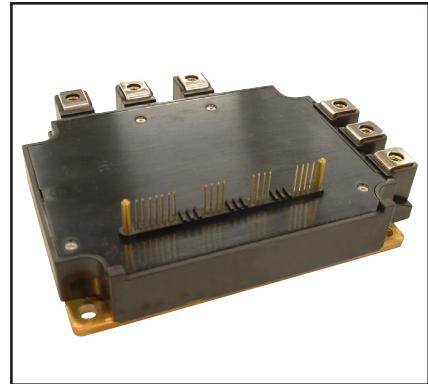


Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**Intellimod™ L-Series**  
**Three Phase**  
**IGBT Inverter + Brake**  
**200 Amperes/600 Volts**

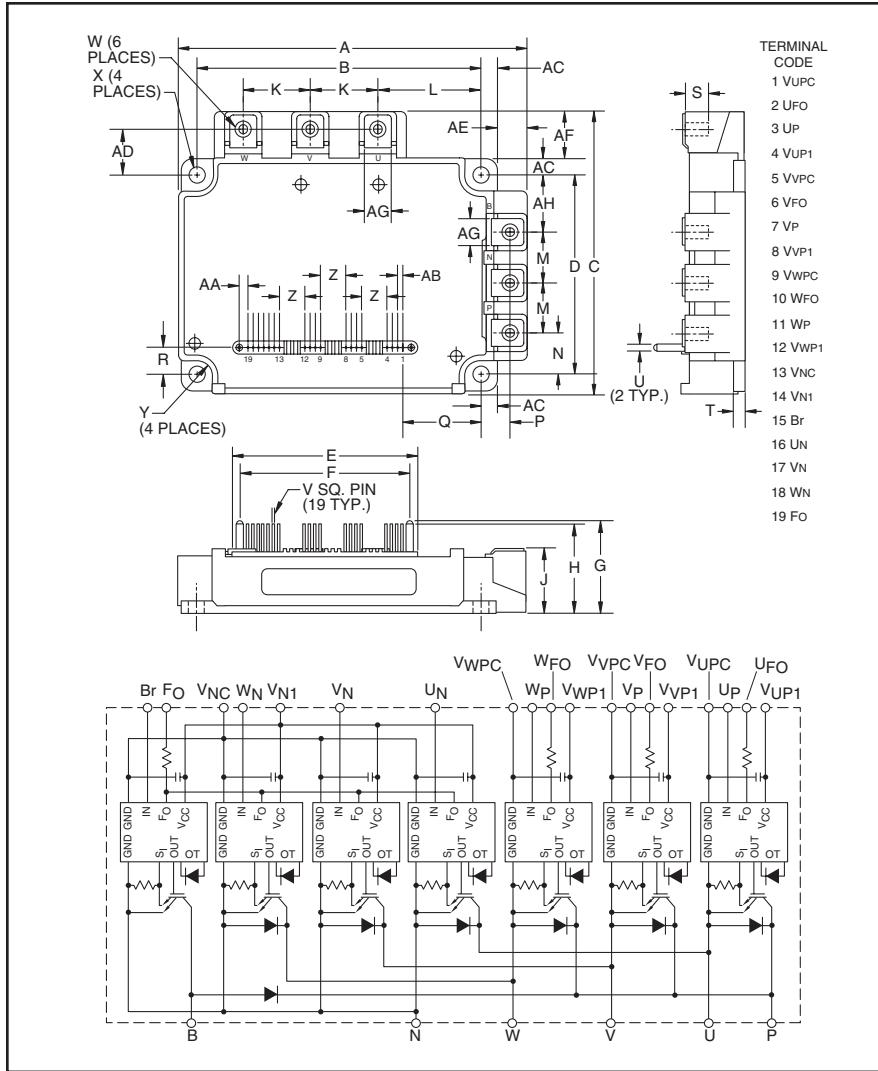

#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Temperature Using On-chip Temperature Sensing
  - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the complete part number from the table below  
 -i.e. PM200RLA060 is a 600V, 200 Ampere Intellimod™ Intelligent Power Module.

Dimensions	Inches	Millimeters
A	5.31	135.0
B	4.33±0.02	110±0.5
C	4.33	110.0
D	3.07	78.0±0.5
E	2.81	71.5
F	2.62	66.5
G	1.37	34.7
H	1.32	33.6
J	0.95+0.04/-0.01	24.1+1.0/-0.5
K	1.02	26.0
L	1.59	40.5
M	0.79	20.0
N	0.65	16.5
P	0.43±0.01	11.0±0.3
Q	1.19	30.15
R	0.43	11.0

Dimensions	Inches	Millimeters
S	0.51	13.0
T	0.16	4.0
U	0.1 Dia.	Dia. 2.5
V	0.02 Sq.	Sq. 0.5
W	M5 Metric	M5
X	0.22 Dia.	Dia. 5.5
Y	0.24 Rad.	Rad. 6
Z	0.39	10.0
AA	0.13	3.25
AB	0.08	2.0
AC	0.24	6.05
AD	0.71	18.0
AE	0.46	11.7
AF	0.74	18.7
AG	0.41	10.5
AH	0.85	21.5

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	200	60



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM200RLA060**

**Intellimod™ L-Series**

**Three Phase IGBT Inverter + Brake**

**200 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM200RLA060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Module Case Operating Temperature (Note 1)	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	800	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	550	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{\text{ISO}}$	2500	Volts

\* $V_D = 13.5 \sim 16.5\text{V}$ , Inverter Part,  $T_j = 125^\circ\text{C}$

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	200	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{\text{CP}}$	400	Amperes
Collector Dissipation, $T_C = 25^\circ\text{C}$ (Note 1)	$P_C$	595	Watts

**IGBT Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	100	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{\text{CP}}$	200	Amperes
Collector Dissipation, $T_C = 25^\circ\text{C}$ (Note 1)	$P_C$	357	Watts
Diode Rated DC Reverse Voltage ( $T_C = 25^\circ\text{C}$ )	$V_{R(\text{DC})}$	600	Volts
Diode Forward Current	$I_F$	100	Amperes

**Control Sector**

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$ , $V_{\text{VP1}}-V_{\text{VPC}}$ , $V_{\text{WP1}}-V_{\text{WPC}}$ , $V_{\text{N1}}-V_{\text{NC}}$ )	$V_D$	20	Volts
Input Voltage (Applied between $\text{U}_P-V_{\text{UPC}}$ , $\text{V}_P-V_{\text{VPC}}$ , $\text{W}_P-V_{\text{WPC}}$ , $\text{U}_N-V_{\text{N}}-\text{W}_N-\text{Br}-V_{\text{NC}}$ )	$V_{\text{CIN}}$	20	Volts
Fault Output Supply Voltage	$V_{\text{FO}}$	20	Volts
(Applied between $\text{U}_{\text{FO}}-V_{\text{UPC}}$ , $\text{V}_{\text{FO}}-V_{\text{VPC}}$ , $\text{W}_{\text{FO}}-V_{\text{WPC}}$ , $\text{F}_{\text{O}}-V_{\text{NC}}$ )			
Fault Output Current ( $\text{U}_{\text{FO}}$ , $\text{V}_{\text{FO}}$ , $\text{W}_{\text{FO}}$ , $\text{F}_{\text{O}}$ Terminals)	$I_{\text{FO}}$	20	mA

**PM200RLA060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
**200 Amperes/600 Volts**


**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$ $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	—	—	1.0	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 200\text{A}, V_{CIN} = 15\text{V}, V_D = 15\text{V}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 200\text{A}, T_j = 25^\circ\text{C}$ $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 200\text{A}, T_j = 125^\circ\text{C}$	—	1.6	2.1	Volts
Inductive Load Switching Times	$t_{on}$ $t_{rr}$ $t_{C(on)}$ $t_{off}$ $t_{C(off)}$	$V_D = 15\text{V}, V_{CIN} = 0 \Leftrightarrow 15\text{V}$ $V_{CC} = 300\text{V}, I_C = 200\text{A}$ $T_j = 125^\circ\text{C}$	0.5 — — — —	1.0 0.2 0.4 1.2 0.5	2.4 0.4 1.0 2.5 1.0	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$

**IGBT Brake Sector**

Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$ $V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	—	—	1.0	mA
Diode Forward Voltage	$V_{FM}$	$I_F = 100\text{A}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 100\text{A}, T_j = 25^\circ\text{C}$ $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 100\text{A}, T_j = 125^\circ\text{C}$	—	1.6	2.1	Volts

Note 1:  $T_C$  Baseplate Measurement Point

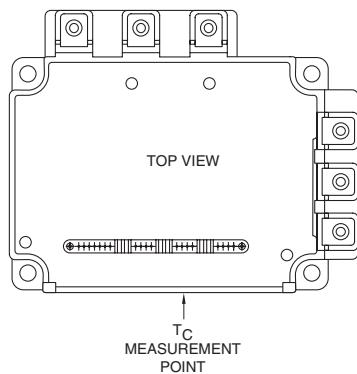



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM200RLA060**

**Intellimod™ L-Series**

**Three Phase IGBT Inverter + Brake**

**200 Amperes/600 Volts**

### Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Short Circuit Trip Level (-20°C ≤ $T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$ )	SC	Inverter Part Brake Part	400 200	— —	— —	Amperes
Short Circuit Current Delay Time	$t_{off}(\text{SC})$	$V_D = 15\text{V}$	—	0.2	—	μs
Over Temperature Protection (Detect $T_j$ of IGBT Chip)	OT $OT_R$	Trip Level Reset Level	135 —	145 125	155 —	°C
Supply Circuit Under-voltage Protection (-20 ≤ $T_j \leq 125^\circ\text{C}$ )	UV $UV_R$	Trip Level Reset Level	11.5 —	12.0 12.5	12.5 —	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{XP1}-V_{XPC}$	— —	24 6	34 12	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between $U_P-V_{UPC}$ ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N-W_N-\text{Br}-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$ $I_{FO(L)}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	— —	— 10	0.01 15	mA
Fault Output Pulse Width*	$t_{FO}$	$V_D = 15\text{V}$	1.0	1.8	—	ms

\*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower devide operate to protect it.

### Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$ $R_{th(j-c)D}$	Inverter IGBT (Per 1/6 Module) (Note 1) Inverter FWDi (Per 1/6 Module)(Note 1)	— —	— —	0.21 0.31	°C/Watt
	$R_{th(j-c)Q}$ $R_{th(j-c)D}$	Brake IGBT (Per 1/6 Module) (Note 1) Brake FWDi (Per 1/6 Module)(Note 1)	— —	— —	0.35 0.56	°C/Watt
	$R_{th(j-c)Q}$ $R_{th(j-c)D}$	Inverter IGBT (Per 1/6 Module) (Note 2) Inverter FWDi (Per 1/6 Module)(Note 2)	— —	— —	0.16** 0.24**	°C/Watt
	$R_{th(j-c)Q}$ $R_{th(j-c)D}$	Brake IGBT (Per 1/6 Module) (Note 2) Brake FWDi (Per 1/6 Module)(Note 2)	— —	— —	0.27** 0.43**	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.023	°C/Watt

\*\* If you use this value,  $R_{th(f-a)}$  should be measured just under the chips.

Note 2:  $T_C$  measurement point is just under the chip.

### Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	≤400	Volts
Control Supply Voltage***	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}, V_{N1}-V_{NC}$	$15.0 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between $U_P-V_{UPC}$ ,	≤0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N-W_N-\text{Br}-V_{NC}$	≥9.0	Volts
PWM Input Frequency	$f_{PWM}$		≤20	kHz
Arm Shoot-through Blocking Time	$t_{DEAD}$	Input Signal	≥2.0	μs

\*\*\* With ripple satisfying the following conditions:  $dv/dt$  swing ≤ ±5V/μs, Variation ≤ 2V peak to peak.