






AUXIL.CONTACT CAN BE MOUNTED ON 1NO+1NC,
FOR 5SX2+4+5

Similar to image

Technical data:

Number of NC contacts		1
Product extension		Auxiliary current switch
Number of change-over switches		0
Number of NO contacts		1
Number of pitch units for width		0.5
Breaking capacity current / nominal value	A	6
Operating voltage / rated value	V	230
Design of product / factory mounted		No
Product extension / can be mounted		Circuit breaker
Number of fault signal contacts		0
Type of voltage / of the control voltage		AC/DC

Certificates/approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
 CSA	 GOST	 VDE	 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report

other

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/VW/view/en/5SX9100/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SX9100

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

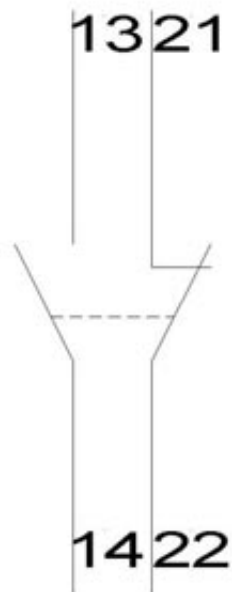

last change:

Feb 15, 2013