



POSEICO SPA
Power SEmiconductors Italian Corporation

POSEICO SPA
Via Pillea 42-44, 16153 Genova - ITALY
Tel. + 39 010 8599400 - Fax + 39 010 8682006
Sales Office:
Tel. + 39 010 8599400 - Fax + 39 010 8681180

RECTIFIER DIODE

AUS603


Repetitive voltage up to **600 V**
Mean forward current **10046 A**
Surge current **65. kA**

FINAL SPECIFICATION

Sept. 09 - Issue: 01



Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		190	600	V
V _{RSM}	Non-repetitive peak reverse voltage		190	700	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	190	100	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180°sin ,50 Hz, Th=55°C, double side cooled		10046	A
I _{F(AV)}	Mean forward current	180°sin ,50 Hz, Tc=85°C, double side cooled		11602	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	190	65	kA
I ² t	I ² t			21125 × 10 ³	A ² s
V _{FM}	Forward voltage	Forward current = 8000 A	190	0,96	V
V _{F(TO)}	Threshold voltage		190	0,70	V
r _F	Forward slope resistance		190	0,032	mohm
SWITCHING					
t _{rr}	Reverse recovery time		190		μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		9	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		3	°C/kW
T _j	Operating junction temperature			-40 / 190	°C
F	Mounting force			30.0 / 55.0	kN
	Mass			135	g

ORDERING INFORMATION : AUS603 S 06

standard specification  VRRM/100



DISSIPATION CHARACTERISTICS

SQUARE WAVE

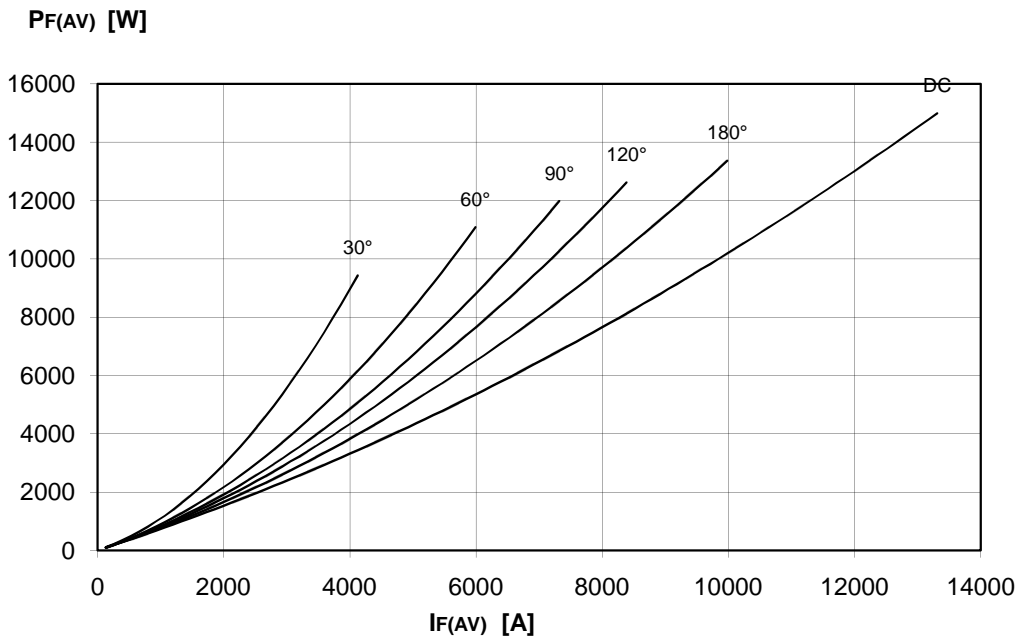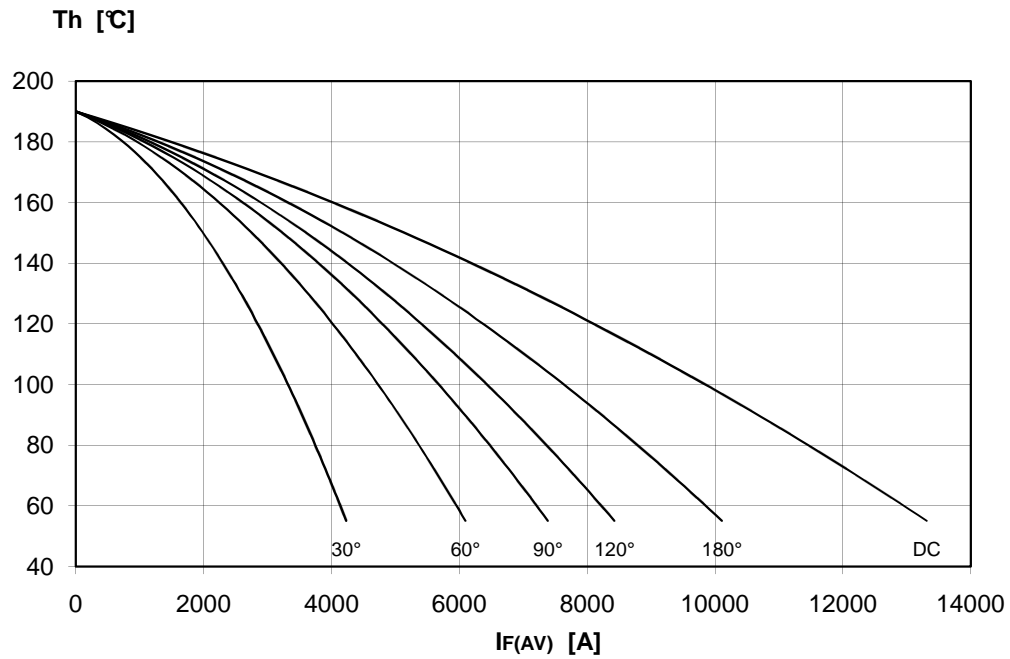


DISSIPATION CHARACTERISTICS


SINE WAVE

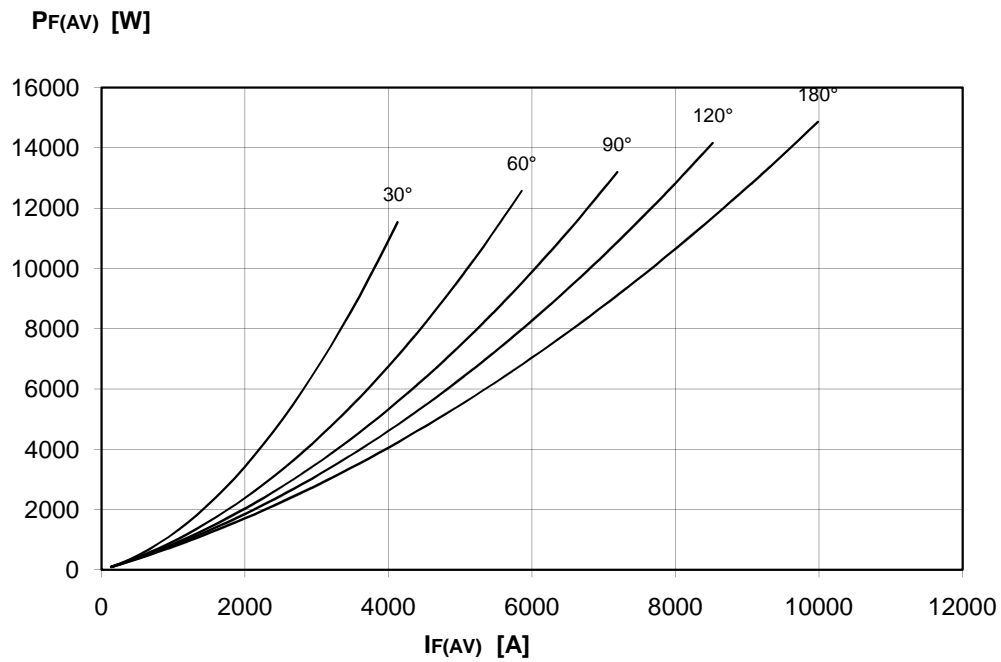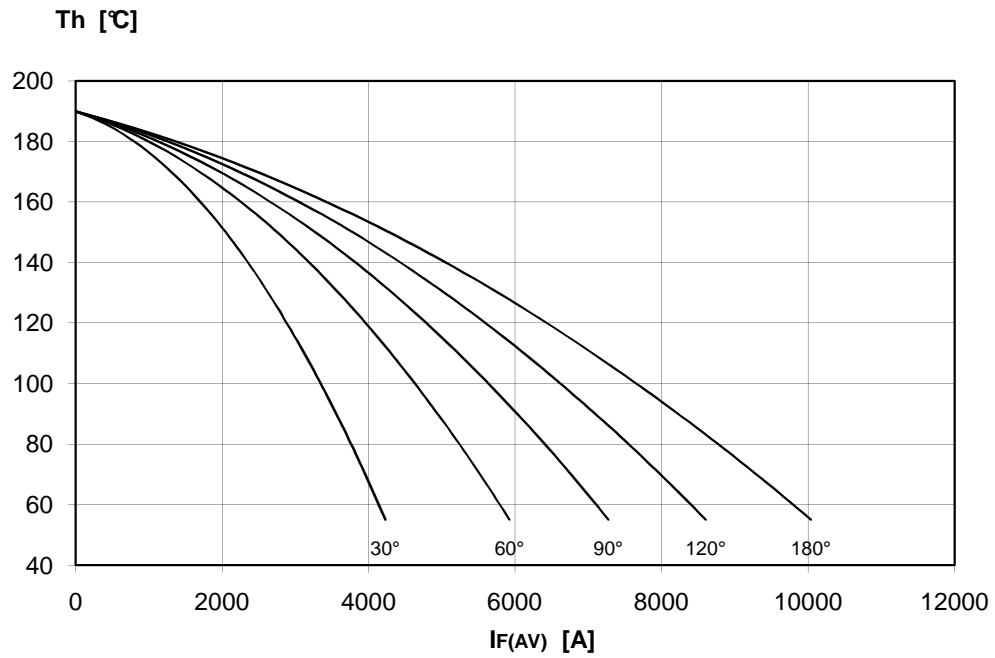



FORWARD CHARACTERISTIC
 $T_j = 190\text{ }^\circ\text{C}$

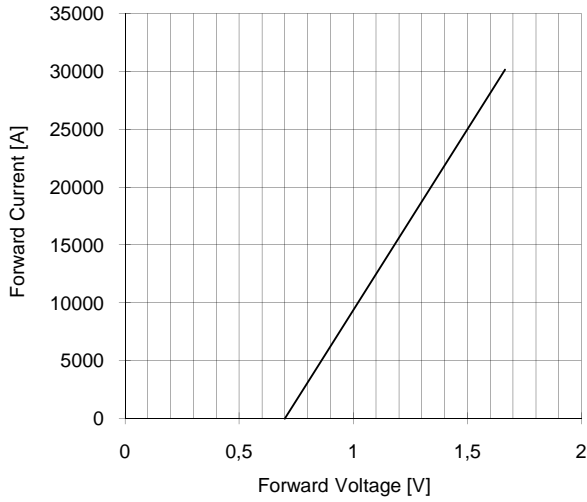

SURGE CHARACTERISTIC
 $T_j = 190\text{ }^\circ\text{C}$

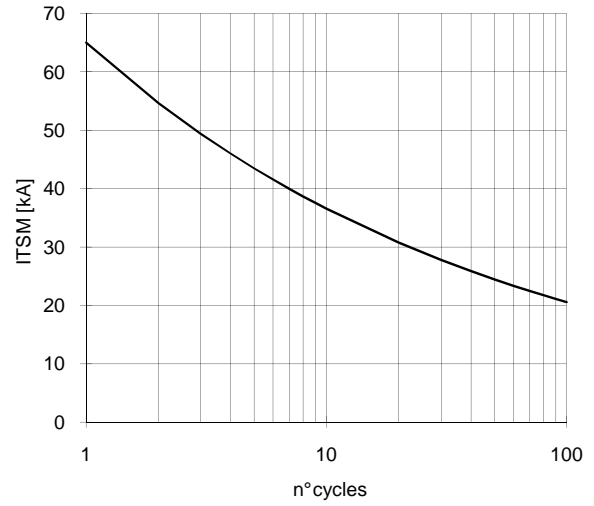

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

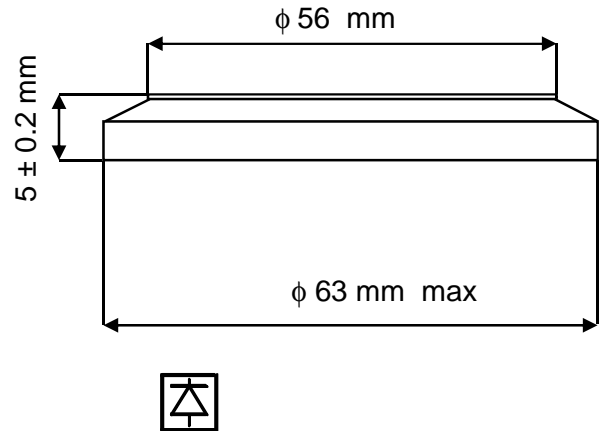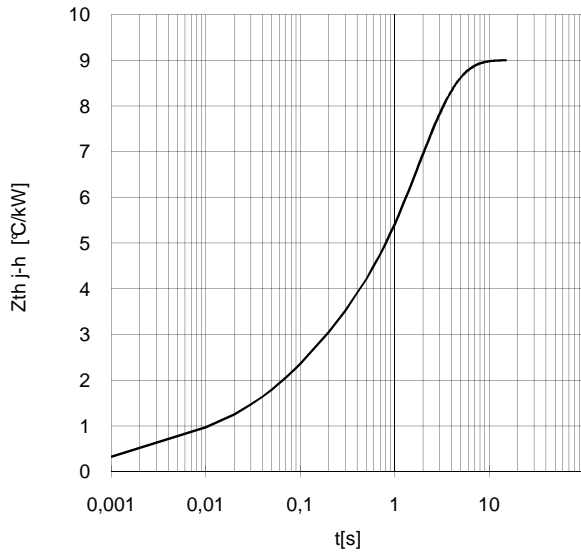

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm .
 In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.
 If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

