





T-25-19

C380__X500

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

Phase Control SCR
310 Amperes Avg
800 Volts

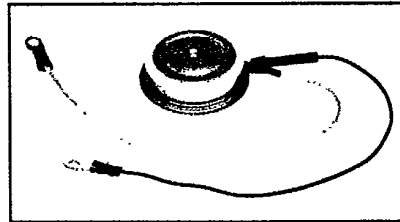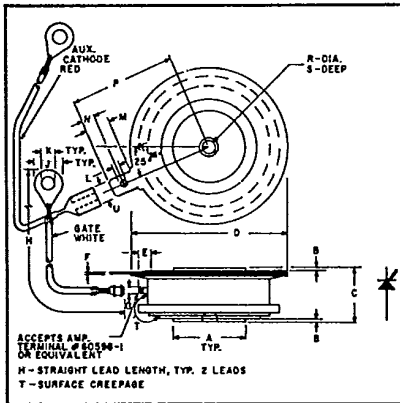

C380__X500
Phase Control SCR
 310 Amperes/800 Volts

Description

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

Features:

- Low On-State Voltage
- High di/dt
- High dv/dt
- Hermetic Packaging
- Excellent Surge and I²t Ratings

Applications:

- Power Supplies
- Battery Chargers
- Motor Control
- Light Dimmers
- VAR Generators

Ordering Information

Example: Select the complete nine digit part number you desire from the table - i.e. C380MX500 is a 600 Volt, 310 Ampere Phase Control SCR.

C380__X500
Outline Drawing

| Dimensions | Inches | | Millimeters | |
|------------|--------|-------|-------------|--------|
| | Min. | Max. | Min. | Max. |
| A | .744 | .752 | 18.897 | 19.101 |
| B | .030 | .060 | .762 | 1.524 |
| C | .515 | .565 | 13.081 | 14.351 |
| D | 1.600 | 1.656 | 40.64 | 42.06 |
| E | .110 | — | 2.794 | — |
| F | .013 | .017 | .330 | .432 |
| G | .057 | .059 | 1.447 | 1.449 |
| H | 7.980 | 8.115 | 202.70 | 206.11 |
| J | — | .300 | — | 7.620 |
| K | .137 | .153 | 3.479 | 3.886 |
| L | .065 | .070 | 1.651 | 1.778 |
| M | .245 | .260 | 6.223 | 6.604 |
| N | .120 | .140 | 3.048 | 3.556 |
| P | 1.090 | 1.125 | 27.69 | 28.55 |
| R | .135 | .145 | 3.429 | 3.683 |
| S | .067 | .083 | 1.701 | 2.108 |
| T | .340 | — | 8.636 | — |
| U | .186 | .189 | 4.724 | 4.801 |

| Type | Voltage | | Current |
|------------|--------------------------------------|------|---------|
| | V _{ORM} V _{RRM} | Code | |
| C380__X500 | 100 | A | 310 |
| | 200 | B | |
| | 300 | C | |
| | 400 | D | |
| | 500 | E | |
| | 600 | M | |
| | 700 | S | |
| | 800 | N | |



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C380_X500
 Phase Control SCR
 310 Amperes Avg/800 Volts

Absolute Maximum Ratings

| | Symbol | C380_X500 | Units |
|---------------------------------------------------------------|--------------|-------------|--------------------|
| RMS On-State Current | $I_{T(RMS)}$ | 500 | Amperes |
| Average On-State Current | $I_{T(av)}$ | 310 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz) | I_{TSM} | 5500 | Amperes |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) | I_{TSM} | 5000 | Amperes |
| Critical Rate-of-Rise of On-State Current (Non-Repetitive) | di/dt | 800 | Amperes/ μ s |
| Critical Rate-of-Rise of On-State Current (Repetitive) | di/dt | 500 | Amperes/ μ s |
| I^2t (for Fusing), One Cycle at 60Hz | I^2t | 125,000 | A ² sec |
| Peak Gate Power Dissipation | P_{GM} | 10 | Watts |
| Average Gate Power Dissipation | $P_{G(av)}$ | 2 | Watts |
| Storage Temperature | T_{STG} | -40 to 150 | °C |
| Operating Temperature | T_J | -40 to 125 | °C |
| Mounting Force [Ⓞ] | | 720 to 880 | lb. |
| Mounting Force [Ⓞ] | | 3.2 to 3.92 | kN |

Electrical and Thermal Characteristics

| Characteristics | Symbol | Test Conditions | C380_X500 | Units |
|--------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------|
| Voltage—Blocking State Maximums | | | | |
| Forward Leakage, Peak | I_{DRM} | $T_J = 125^\circ\text{C}, V = V_{DRM}$ | 20 | mA |
| Reverse Leakage, Peak | I_{RRM} | $T_J = 125^\circ\text{C}, V = V_{RRM}$ | 20 | mA |
| Current—Conducting State Maximums | | | | |
| Peak On-State Voltage | V_{TM} | $T_C = 125^\circ\text{C}, I_{TM} = 1500\text{A}, \text{Duty Cycle} = 0.01\%$ | 1.75 | Volts |
| Switching | | | | |
| Typical Turn-On Delay | t_d | $T_C = 25^\circ\text{C}, I_T = 100\text{A}, V_{DRM} = \text{rated.}$ Gate Supply 10V Open Circuit, 25 Ω , 0.1 μ sec max. rise time | 1 | μ sec |
| Min. Critical dv/dt exponential to V_{DRM} | dv/dt | $T_J = 125^\circ\text{C}, \text{Gate open circuited.}$ | 200 | V/ μ sec |
| Thermal | | | | |
| Maximum Thermal Resistance, [Ⓞ] double sided cooling Junction to Case | $R_{\theta JC}$ | | 0.095 | °C/Watt |
| Case to Sink, Lubricated | $R_{\theta CS}$ | | .02 | °C/Watt |
| Gate—Maximum Parameters | | | | |
| Gate Current to Trigger | I_{GT} | $T_C = 25^\circ\text{C}, V_D = 6\text{V}, R_L = 3 \Omega$ | 150 | mA |
| Gate Voltage to Trigger | V_{GT} | $T_C = -40^\circ\text{C} \text{ to } 125^\circ\text{C}, V_D = 6\text{V}, R_L = 3 \Omega$ | 3.0 | Volts |
| Non-Triggering Gate Voltage | V_{GDM} | $T_J = 125^\circ\text{C}, \text{Rated } V_{DRM}, R_L = 1000 \Omega$ | .15 | Volts |
| Peak Forward Gate Current | I_{GTM} | | 10 | Amperes |
| Peak Reverse Gate Voltage | V_{GRM} | | 5 | Volts |


[Ⓞ] Consult recommended mounting procedures.




Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C380_X500
 Phase Control SCR
 310 Amperes Avg/800 Volts


MAXIMUM ON-STATE CHARACTERISTICS

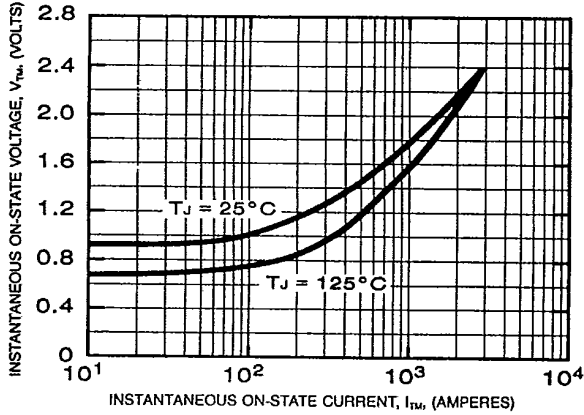


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)

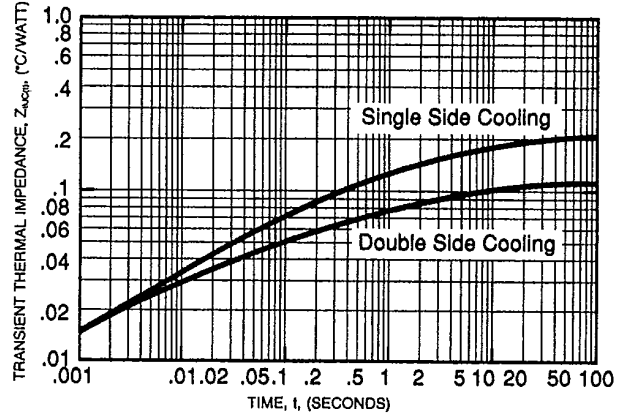


MAXIMUM ALLOWABLE CASE TEMPERATURE (SINUSOIDAL WAVEFORM)

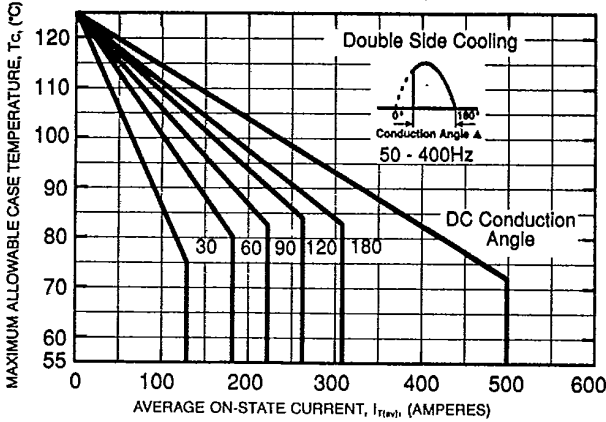


MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)

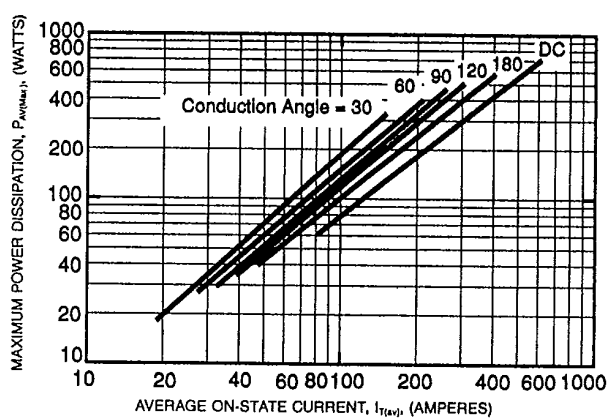

MAXIMUM ALLOWABLE CASE TEMPERATURE (RECTANGULAR WAVEFORM)

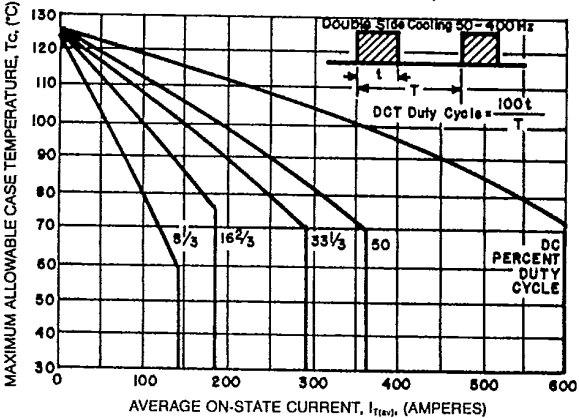

MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

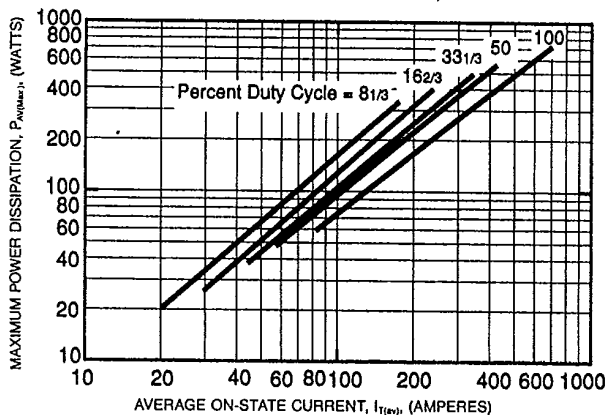





Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C380...X500
 Phase Control SCR
 310 Amperes Avg/800 Volts

SUB-CYCLE SURGE AND I²t RATINGS
 (RATED LOAD CONDITIONS)

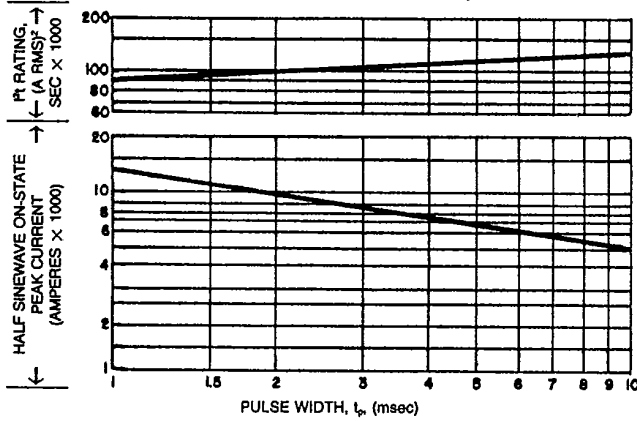

GATE CHARACTERISTICS

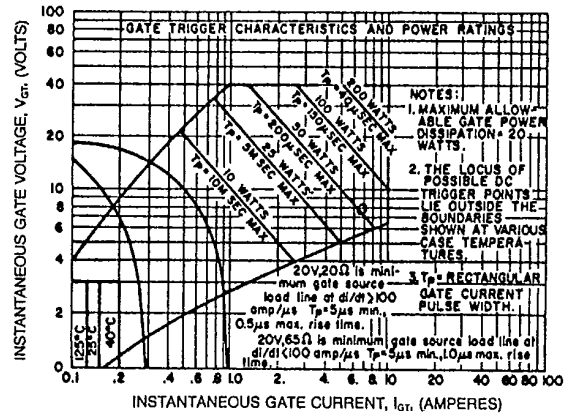

- NOTES:
1. Maximum allowable gate power dissipation = 2 watts.
 2. The locus of possible DC trigger points lie outside the boundaries shown at various case temperatures.
 3. Tp = Rectangular Gate Current Pulse Width.