

## Three Phase Silicon Bridge Rectifier


$V_{RRM} = 800\text{ V} - 1600\text{ V}$

$I_{F(AV)} = 200\text{ A}$

### Features

- High Surge Capability
- Types from 800 V to 1600 V  $V_{RRM}$
- Not ESD Sensitive

### Three Phase Package



### Maximum ratings, at $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Conditions	MDS200-08	MDS200-12	MDS200-16	Unit
Repetitive peak reverse voltage	$V_{RRM}$		800	1200	1600	V
Reverse unrepeatd voltage	$V_{RSM}$		960	1320	1760	V
Operating temperature	$T_j$		-40 to 150	-40 to 150	-40 to 150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to 125	-40 to 125	-40 to 125	$^\circ\text{C}$

### Electrical characteristics, at $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Single phase, half sine wave, 50 Hz, resistive or inductive load.

For capacitive load derate current by 20%.

Parameter	Symbol	Conditions	MDS200-08	MDS200-12	MDS200-16	Unit
Average forward current	$I_{F(AV)}$	3-phase, full-wave, $T_C = 90\text{ }^\circ\text{C}$	200	200	200	A
Peak forward surge current	$I_{FSM}$	1 pulse, 50/60 Hz, unrepeated	2000	2000	2000	A
Maximum forward voltage (per leg)	$V_F$	$I_{FM} = 200\text{ A}$ , $T_j = 25\text{ }^\circ\text{C}$	1.45	1.45	1.45	V
Maximum repeated reverse current at rated DC blocking voltage (per leg)	$I_R$	$T_A = 25\text{ }^\circ\text{C}$	12	12	12	$\mu\text{A}$
		$T_A = 125\text{ }^\circ\text{C}$	750	750	750	$\mu\text{A}$

### Thermal characteristics

Maximum thermal resistance, junction - case (per leg)	$R_{\theta jc}$		0.15	0.15	0.15	$^\circ\text{C/W}$
---	-----------------	--	------	------	------	--------------------

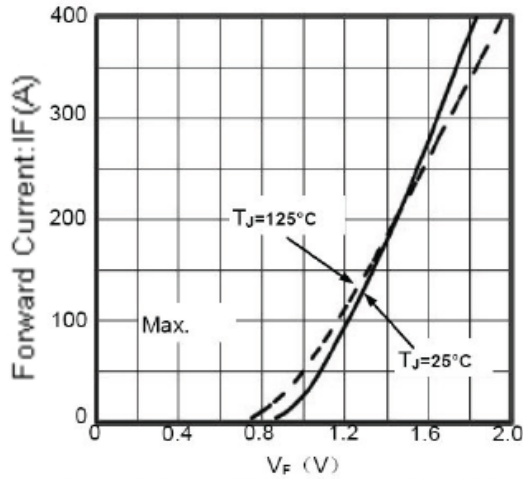


Figure1. Forward Voltage Drop vs Output Current

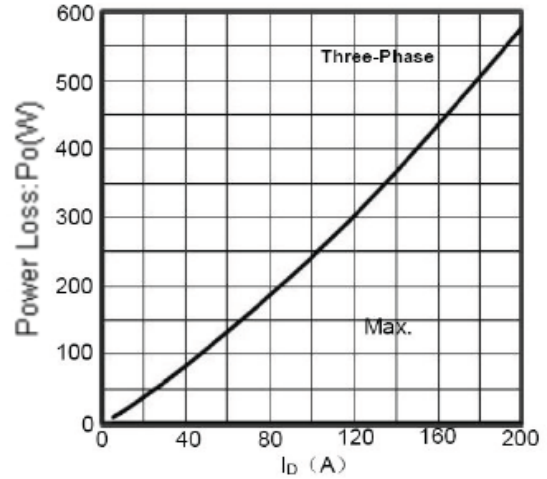


Figure2. Power dissipation vs. Output Current

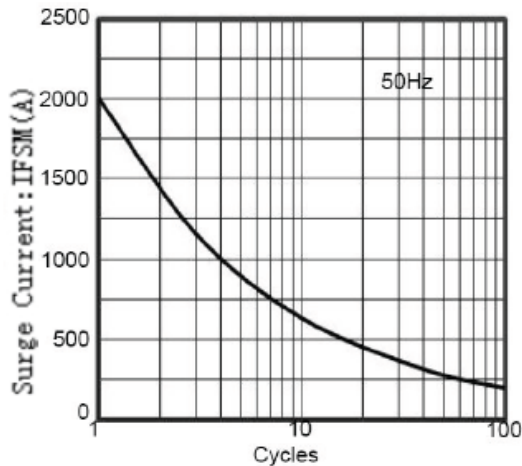


Figure3. Max Non-Repetitive Forward Surge Current

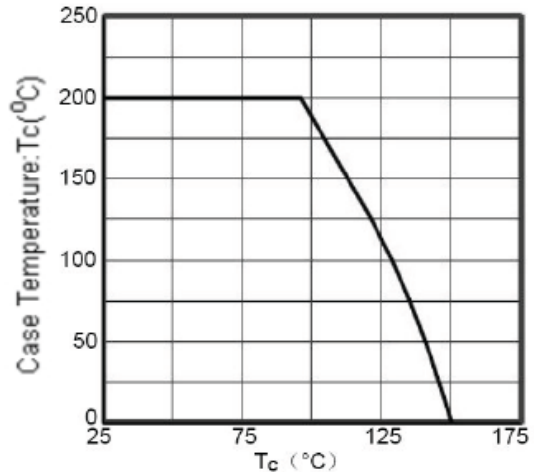


Figure4. Output Current vs. Case temperature


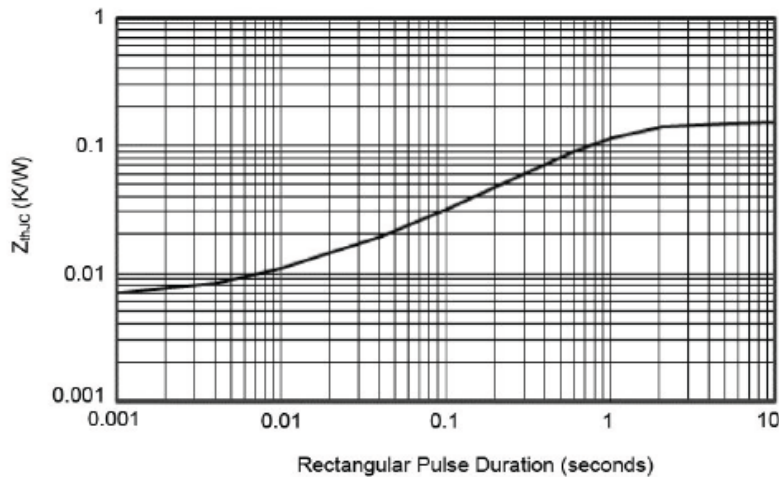



Figure5. Transient Thermal Impedance

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

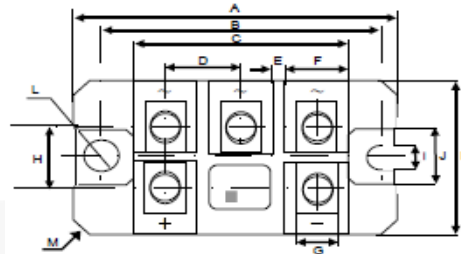

■ Inner Circuit Schematic

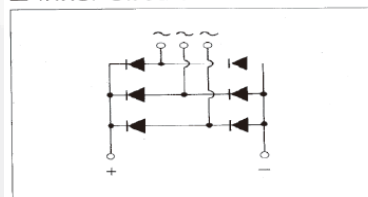

DIM	Inches		Millimeters	
	Min	Max	Min	Max
A	3.15	---	80	---
B	2.60	---	66	---
C	2.01	---	51	---
D	0.71	---	18	---
E	0.16	---	4	---
F	0.57	---	14.5	---
G	0.40	---	10.2	---
H	0.63	---	16	---
I	0.26	---	6.7	---
J	0.55	---	14	---
K	1.57	---	40	---
L	$\varnothing 0.26$	---	$\varnothing 6.7$	---
M	4-C5			
N	---	0.90 MAX	---	23 MAX
O	---	1.06 MAX	---	27 MAX
P	---	1.14 MAX	---	29 MAX