

isc Silicon PNP Darlington Power Transistor


MJ900

DESCRIPTION

- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -60V(\text{Min.})$
- High DC Current Gain-
: $h_{FE} = 1000(\text{Min.}) @ I_C = -3A$
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = -2.0V(\text{Max.}) @ I_C = -3A$


APPLICATIONS

- Designed for use as output devices in complementary general purpose amplifier applications.

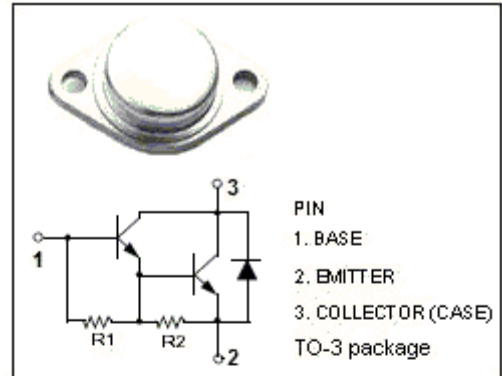

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-8	A
I_B	Base Current-Continuous	-0.1	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ C$	90	W
T_j	Junction Temperature	200	$^\circ C$
T_{stg}	Storage Temperature Range	-55~+200	$^\circ C$

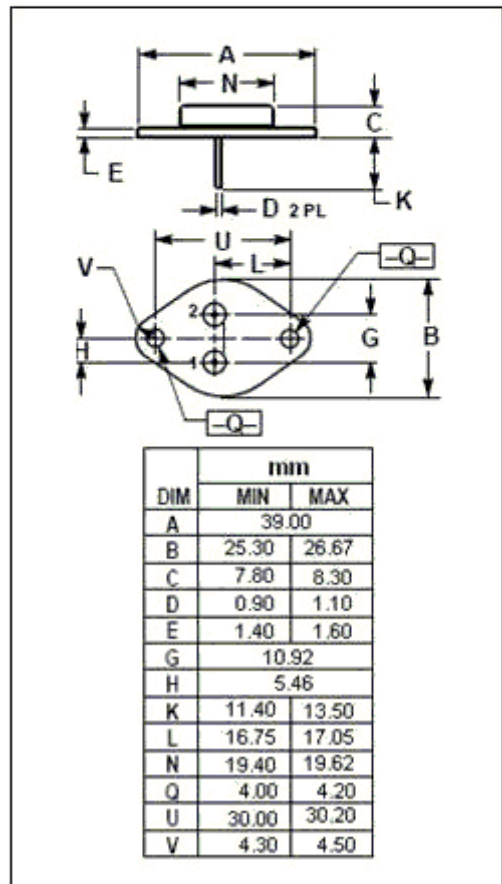

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.94	$^\circ C/W$

isc Silicon PNP Darlington Power Transistor

MJ900

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=-0.1\text{A}; I_B=0$	-60			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=-3\text{A}; I_B=-12\text{mA}$			-2.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=-8\text{A}; I_B=-40\text{mA}$			-4.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=-3\text{A}, V_{CE}=-3\text{V}$			-2.5	V
I_{CER}	Collector Cutoff Current	$V_{CE}=-60\text{V}; R_{BE}=1\text{k}\Omega$ $V_{CE}=-60\text{V}; R_{BE}=1\text{k}\Omega; T_C=150^{\circ}\text{C}$			-1.0 -5.0	mA
I_{CEO}	Collector Cutoff Current	$V_{CE}=-30\text{V}; I_B=0$			-0.5	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=-5\text{V}; I_C=0$			-2.0	mA
h_{FE-1}	DC Current Gain	$I_C=-3\text{A}, V_{CE}=-3\text{V}$	1000			
h_{FE-2}	DC Current Gain	$I_C=-4\text{A}, V_{CE}=-3\text{V}$	750			