

# X2G100SD12P1

## HIGH POWER SPT+ TYPE 2-PACK IGBT MODULE



1200V  
100A


PACKAGE : M1

### FEATURES

- Soft Punch Through (SPT+) Technology
- Fast & soft inverse CAL diodes
- 10us short circuit capability
- Positive  $V_{CE(on)}$  temperature coefficient
- Industry standard package

### CIRCUIT DIAGRAM

PRELIMINARY

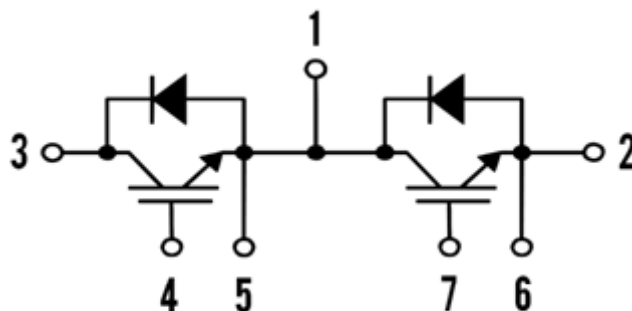

### APPLICATIONS

- High power inverter
- Switched mode power supplies (SMPS)
- UPS
- Electrical welding machine

### ABSOLUTE MAXIMUM RATINGS

$T_c=25^{\circ}\text{C}$ , unless otherwise specified

Symbol	Parameter	Conditions	Ratings	Unit
$V_{CES}$	Collector-emitter voltage	-	1200	V
$I_C$	DC-collector current	$T_C = 25^{\circ}\text{C}$	150	A
		$T_C = 80^{\circ}\text{C}$	100	A
$I_{CRM}$	Repetitive peak collector current	1ms	200	A
$V_{GES}$	Gate-emitter peak voltage	-	$\pm 20$	V
$I_F$	Diode continuous forward current	$T_C = 80^{\circ}\text{C}$	100	A
$I_{FRM}$	Diode repetitive peak forward current	-	150	A
$T_{vj,max}$	Maximum junction temperature	-	-40 ~ 150	$^{\circ}\text{C}$
$T_{vj,op}$	Operating temperature range	-	-40 ~ 125	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature range	-	-40 ~ 125	$^{\circ}\text{C}$
$V_{ISOL}$	Insulation test voltage	50Hz, t=1ms	2.5	kV
$M_S$	Mounting screw torque	M6	3.0 ~ 6.0	N.m
$M_t$	Mounting terminals screw torque	M5	2.5 ~ 5.0	N.m

Technical information and specification subject to change without notice.

**PRELIMINARY**

### ELECTRICAL CHARACTERISTICS OF IGBT

$T_J=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
$V_{CE(Sat)}$	C-E saturation voltage	-	1.8	-	V	$I_C = 100A, V_{GE} = 15V, T_{vj} = 25^\circ\text{C}$
		-	2.0	-	V	$I_C = 100A, V_{GE} = 15V, T_{vj} = 125^\circ\text{C}$
$V_{GE(th)}$	G-E threshold voltage	5.0	6.2	7.0	V	$I_C = 4mA, V_{CE} = V_{GE}$
$I_{CES}$	Zero gate voltage collector current	-	400	-	$\mu\text{A}$	$V_{GE} = 0V, V_{CE} = 1200V$
$I_{GES}$	G-E leakage current	-200	-	200	nA	$V_{GE} = \pm 20V$
$R_{Gint}$	Internal gate resistance	-	2.0	-	$\Omega$	-
$C_{ies}$	Input capacitance	-	8.27	-	nF	$V_{GE} = 0V,$ $f = 1\text{MHz},$ $V_{CE} = 25V,$ $T_{vj} = 25^\circ\text{C}$
$C_{oes}$	Output capacitance	-	0.83	-		
$C_{res}$	Reverse transfer capacitance	-	0.62	-		
$Q_g$	Total gate charge	-	1050	-	nC	$V_{GE} = \pm 15V$
$t_{d(on)}$	Turn-on delay time	-	135	-	ns	$V_{CE} = 600V,$ $I_C = 100A,$ $V_{GE} = \pm 15V,$ $R_G = 10\Omega,$ $T_{vj} = 125^\circ\text{C}$
$t_r$	Turn-on rise time	-	60	-		
$t_{d(off)}$	Turn-off delay time	-	490	-		
$t_f$	Turn-off fall time	-	75	-		
$E_{ON}$	Turn-on Energy loss	-	12.4	-	mJ	
$E_{OFF}$	Turn-off Energy loss	-	10.8	-		

### ELECTRICAL CHARACTERISTICS OF FRD

$T_J=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
$V_F$	Diode Forward Voltage Drop	-	1.6	-	V	$T_{vj} = 25^\circ\text{C}$
		-	1.6	-		$T_{vj} = 125^\circ\text{C}$
$I_{rr}$	Peak Reverse Recovery Current	-	51	-	A	$I_F = 100A$
$Q_{rr}$	Diode Recovery Charge	-	18	-	$\mu\text{C}$	$V_{CE} = 600V$ $V_{GE} = 15V$ $T_{vj} = 125^\circ\text{C}$

### THERMAL AND MECHANICAL CHARACTERISTICS

$T_J=25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter	Min	Typ	Max	Unit	Condition
$R_{th(j-c)}$	Junction-to-Case (IGBT Part, Per 1/2 Module)	-	0.15	-	K/W	
$R_{th(j-c)}$	Junction-to-Case (FRD Part, Per 1/2 Module)	-	0.54	-	K/W	
$R_{th(c-f)}$	Case-to-Heat Sink (With Thermal Compound)	-	0.05	-	K/W	
Weight	Module		180		g	

Technical information and specification subject to change without notice.

#### PERFORMANCE CURVES (I)

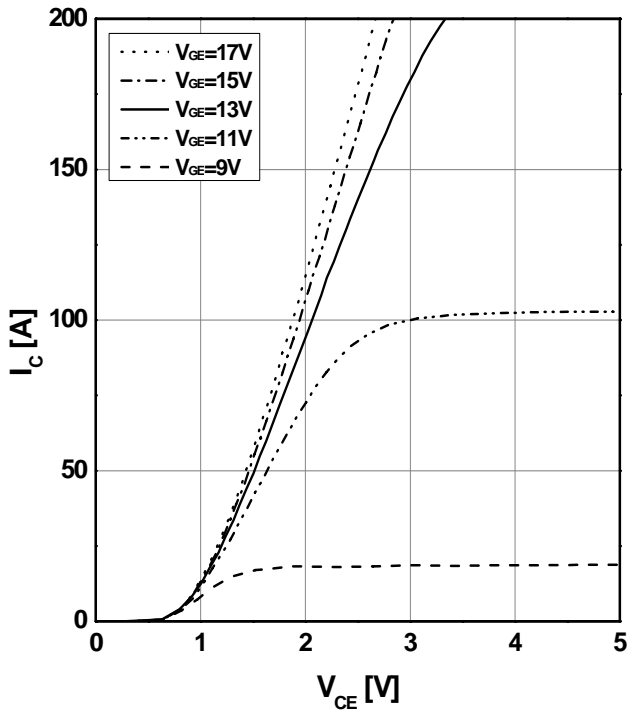


Fig1. Typical Output Characteristics

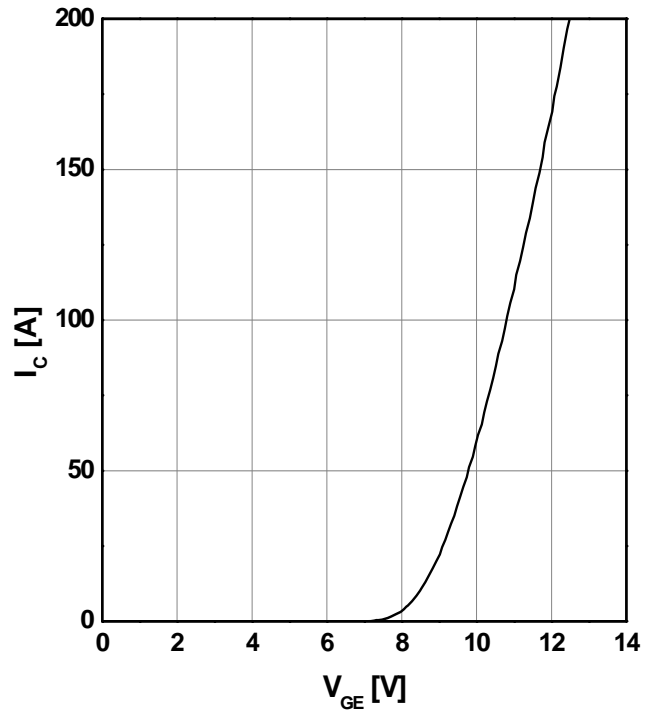


Fig2. Transfer Characteristics

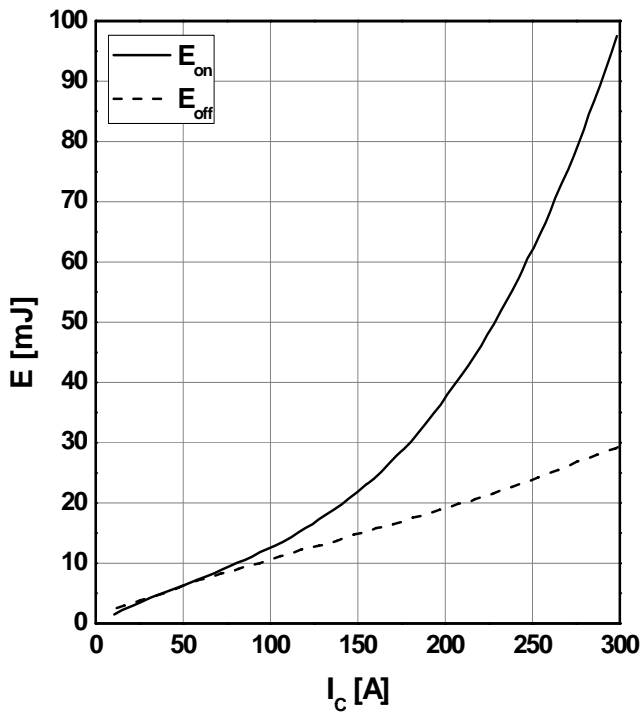


Fig3. Energy Loss vs.  $I_c$

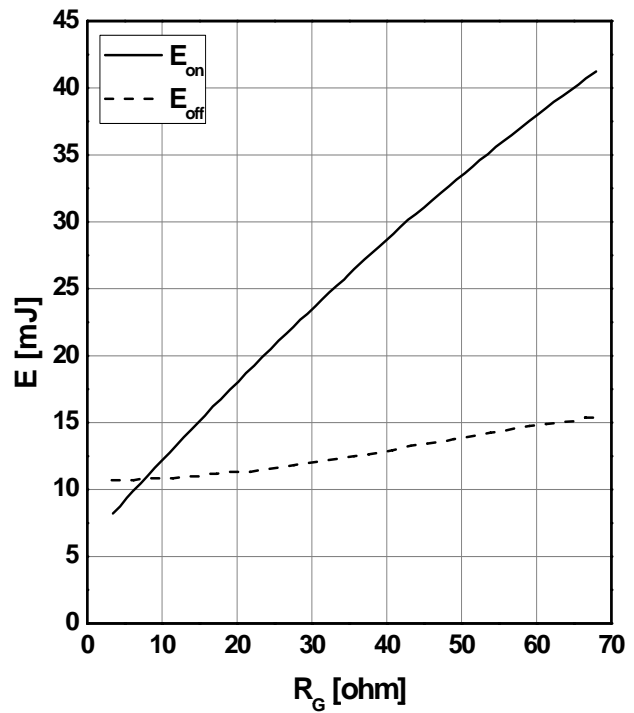


Fig4. Energy Loss vs.  $R_G$

Technical information and specification subject to change without notice.

#### PERFORMANCE CURVES (II)

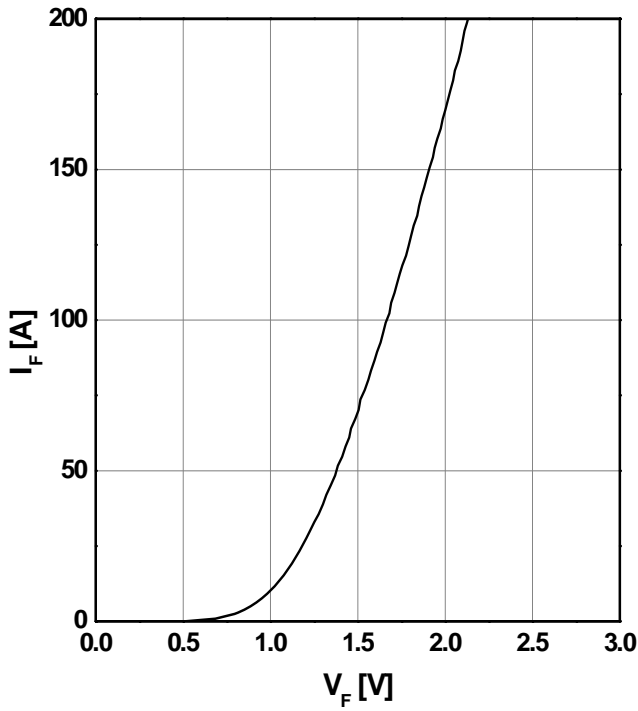


Fig5. DIODE Forward Characteristic

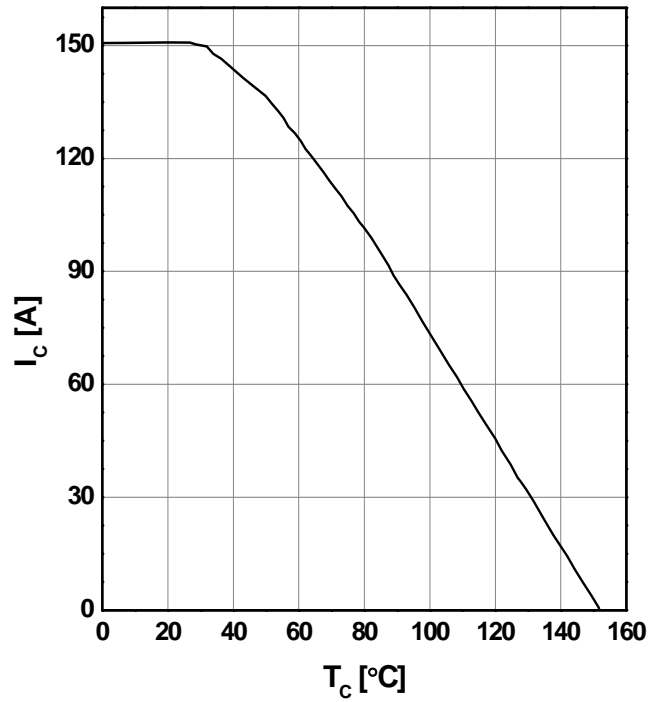


Fig6. Reverse Bias SOA (T<sub>vj</sub> = 125°C)

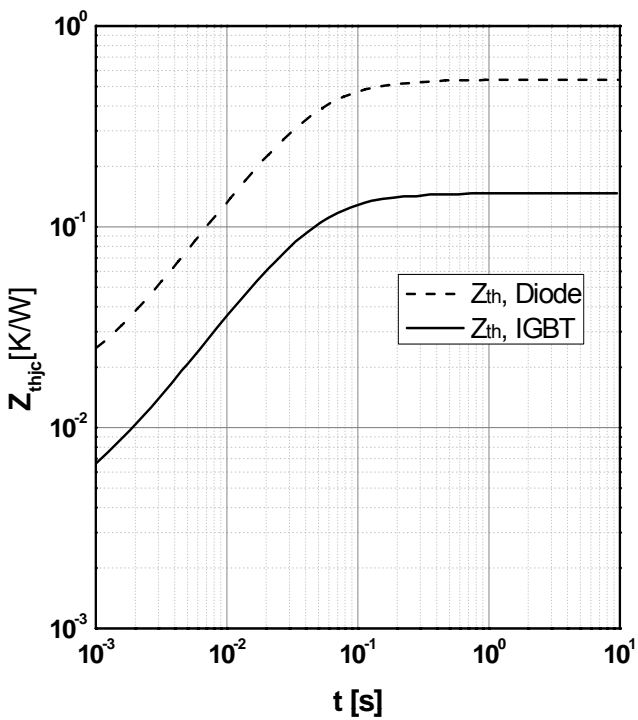


Fig7. Transient Thermal

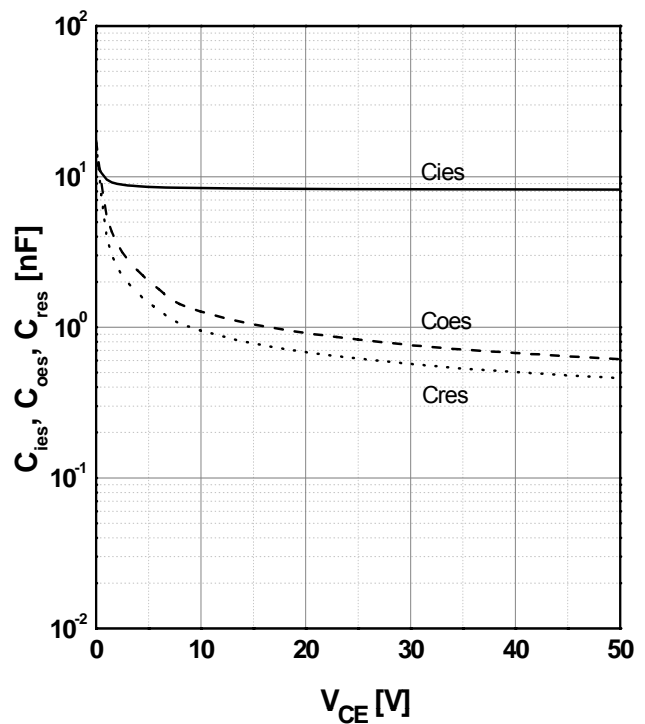


Fig8. Typ. Capacitance

Technical information and specification subject to change without notice.

